




**MANUAL**

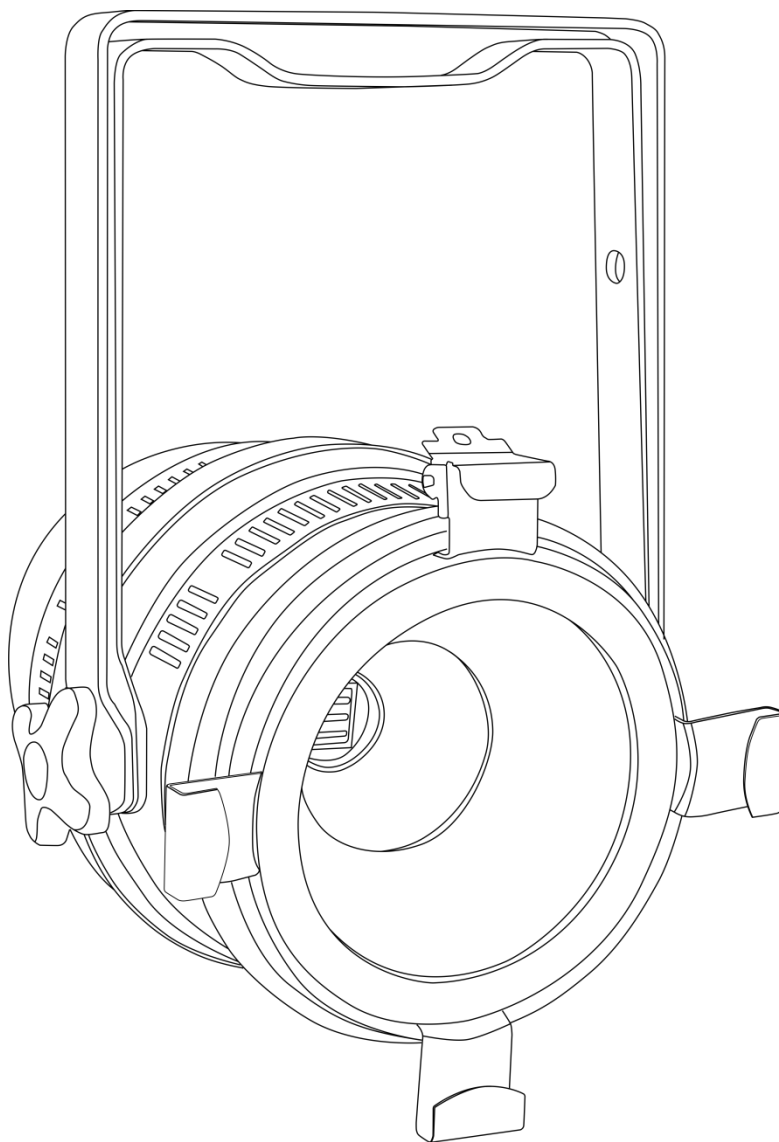

**ENGLISH**

**LED Par 64 COB RGBW 200W V1**

**Ordercode: 43305**

**Table of contents**

**Warning** .....2  
Safety Instructions .....2  
Operating Determinations .....4  
Rigging .....4  
Connection with the mains .....5  
Return Procedure .....6  
Claims .....6

**Description of the device** .....7  
Frontside .....7  
Backside .....8

**Installation** .....8

**Set Up and Operation** .....8  
Control Modes .....9  
One LED Par (Built-in programs and Manual Mode) .....9  
Multiple LED Pars (DMX Control) .....9  
Fixture Linking .....10  
Data Cabling .....10  
Control Panel .....11  
Control Mode .....11  
DMX Addressing .....11  
Menu Overview .....12  
Main Menu Options .....13  
1. Built-in Programs .....13  
2. Program Speed .....13  
3. Dimmer Red .....13  
4. Dimmer Green .....14  
5. Dimmer Blue .....14  
6. Dimmer White .....14  
7. Fixture Hours .....14  
8. Lock Key .....14  
9. DMX 4-channel mode .....14  
10. DMX 8-channel mode .....14  
11. DMX 15-channel mode .....14  
12. Color Mode (LEE + Kelvin) .....15  
DMX Channels .....15  
4 channels .....15  
8 channels .....16  
15 channels .....16

**Maintenance** .....18  
Replacing the Fuse .....18

**Troubleshooting** .....18  
No Light .....18  
No Response to DMX .....19

**Product Specifications** .....20

**Dimensions** .....21

**Notes** .....22

## Warning



**For your own safety, please read this user manual carefully  
before your initial start-up!**





## Unpacking Instructions

Immediately upon receiving this product, carefully unpack the carton and check the contents to ensure that all parts are present, and have been received in good condition. Notify the dealer immediately and retain packing material for inspection if any parts appear damaged from shipping or the carton itself shows signs of mishandling. Save the carton and all packing materials. In the event that a fixture must be returned to the factory, it is important that the fixture be returned in the original factory box and packing.

### Your shipment includes:

- Showtec LED Par 64 COB RGBW
- Pro power cable (1,5 m)
- User manual

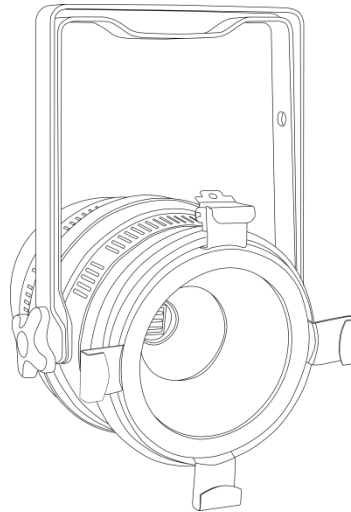

## LED Expected Lifespan

LEDs gradually decline in brightness over time. HEAT is the dominant factor that leads to the acceleration of this decline. Packaged in clusters, LEDs exhibit higher operating temperatures than in ideal or singular optimum conditions. For this reason, when all color LEDs are used at their fullest intensity, life of the LEDs is significantly reduced. If improving the lifespan is of higher priority, place care in providing for lower operational temperatures. This may include climatic-environmental and the reduction of overall projection intensity.



### **CAUTION!**

**Keep this device away from rain and moisture!  
Unplug mains lead before opening the housing!**



## Safety Instructions

Every person involved with the installation, operation and maintenance of this device has to:

- be qualified
- follow the instructions of this manual



**CAUTION! Be careful with your operations.  
With a dangerous voltage you can suffer  
a dangerous electric shock when touching the wires!**



Before the initial start-up, please make sure that there is no damage caused by transportation. Should there be any, consult your dealer and do not use the device.

To maintain perfect condition and to ensure a safe operation, it is absolutely necessary for the user to follow the safety instructions and warning notes contained in this manual.

Please consider that damages caused by manual modifications to the device are not subject to warranty.

This device contains no user-serviceable parts. Refer servicing to qualified technicians only.

**IMPORTANT:**

The manufacturer will not accept liability for any resulting damages caused by the non-observance of this manual or any unauthorized modification to the device.

- Never let the power cord come into contact with other cables! Handle the power cord and all connections with the mains with particular caution!
- Never remove warning or informative labels from the unit.
- Never use anything to cover the ground contact.
- Always hold the fixture by the transport handles.
- Never place any material over the lens.
- Never look directly into the light source.
- Never leave any cables lying around.
- Do not insert objects into air vents.
- Do not connect this device to a dimmerpack.
- Do not switch the device on and off in short intervals, as this will reduce the device's life.
- Do not touch the device's housing bare-handed during its operation (housing becomes very hot). Allow the fixture to cool for at least 5 minutes before handling.
- Do not shake the device. Avoid brute force when installing or operating the device.
- Only use the device indoors, avoid contact with water or other liquids.
- Only operate the fixture after having checked if the housing is firmly closed and all screws are tightly fastened.
- Only operate the device after having familiarized with its functions.
- Avoid flames and do not put close to flammable liquids or gases.
- Always keep the case closed while operating.
- Always allow a free air space of at least 50 cm around the unit for ventilation.
- Always disconnect power from the mains, when device is not used or before cleaning! Only handle the power cord holding it by the plug. Never pull out the plug by tugging the power cord.
- Make sure that the device is not exposed to extreme heat, moisture or dust.
- Make sure that the available voltage is not higher than stated on the rear panel.
- Make sure that the power cord is never crimped or damaged. Check the device and the power cord from time to time.
- If the lens is obviously damaged, it has to be replaced.
- If device was dropped or struck, disconnect mains power supply immediately. Have a qualified engineer inspect for safety before operating.
- If the device has been exposed to drastic temperature fluctuation (e.g. after transportation), do not switch it on immediately. The arising condensation water might damage your device. Leave the device switched off until it has reached room temperature.
- If your Showtec device fails to work properly, discontinue the use immediately. Pack the unit securely (preferably in the original packing material), and return it to your Showtec dealer for service.
- For adult use only. The fixture must be installed beyond the reach of children. Never leave the unit running unattended.
- Never attempt to bypass the thermostatic switch or fuses.
- For replacement use fuses of same type and rating only.
- The user is responsible for correct positioning and operating of the LED Par 64 COB RGBW. The manufacturer will not accept liability for damages caused by the misuse or incorrect installation of this device.
- This device falls under protection class I. Therefore it is essential to connect the yellow/green conductor to earth.

- Repairs, servicing and electric connection must be carried out by a qualified technician.
- WARRANTY: Till one year after date of purchase.



### **Operating Determinations**

- This device is not designed for permanent operation. Consistent operation breaks will ensure that the device will serve you for a long time without defects.
- The minimum distance between light output and the illuminated surface must be bigger than 1 meter.
- The maximum ambient temperature  $t_a = 40^\circ\text{C}$  must never be exceeded.
- The relative humidity must not exceed 50 % with an ambient temperature of  $40^\circ\text{C}$ .
- If this device is operated in any other way than the one described in this manual, the product may suffer damages and the warranty becomes void.
- Any other operation may lead to dangers like short-circuit, burns, electric shock, crash, etc.

*You endanger your own safety and the safety of others!*

### **Rigging**


Please follow the European and national guidelines concerning rigging, trussing and all other safety issues.

Do not attempt the installation yourself !

Always let the installation be carried out by an authorized dealer !

### **Procedure:**

- If the projector is lowered from the ceiling or high joists, professional trussing systems have to be used.
- Use a clamp to mount the projector, with the mounting bracket, to the trussing system.
- The projector must never be fixed swinging freely in the room.
- The installation must always be secured with a safety attachment, e.g. an appropriate safety net or safety cable.
- When rigging, derigging or servicing the projector, always make sure, that the area below the installation site is secured and that there are not any unauthorized people around.

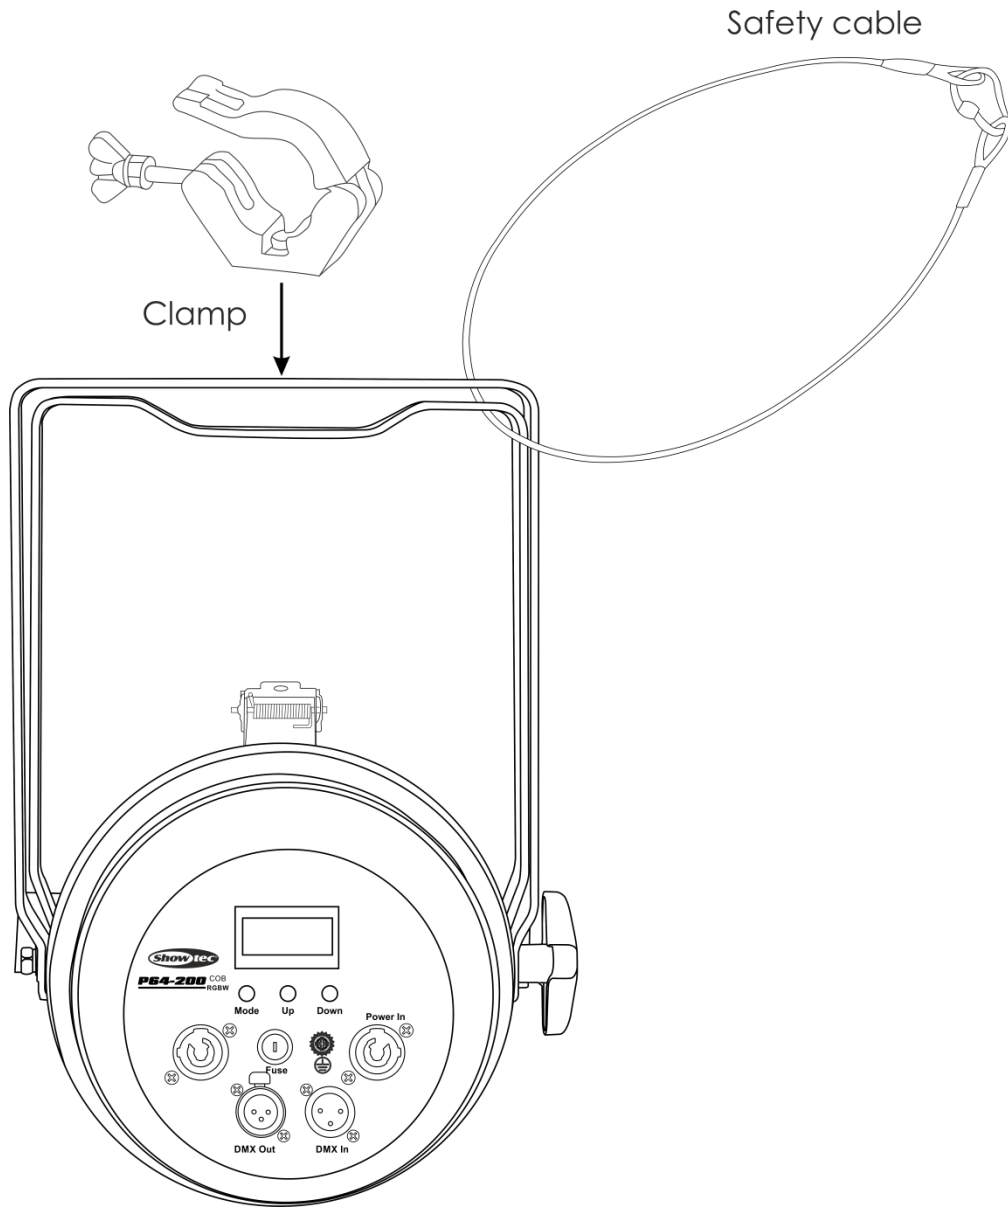

The LED Par 64 COB RGBW can be placed on a flat stage floor or mounted to any kind of truss with a clamp.

Improper installation can cause serious injuries and/or damage of property!

**Connection with the mains**

Connect the device to the mains with the power-plug.  
Always check if the right color cable is connected to the right place.

International	EU Cable	UK Cable	US Cable	Pin
L	BROWN	RED	YELLOW/COPPER	PHASE
N	BLUE	BLACK	SILVER	NEUTRAL
⊕	YELLOW/GREEN	GREEN	GREEN	PROTECTIVE GROUND

**Make sure that the device is always properly connected to the earth!**

Improper installation can cause serious injuries and/or damage of property!



### **Return Procedure**

Returned merchandise must be sent prepaid and in the original packing, call tags will not be issued. Package must be clearly labeled with a Return Authorization Number (RMA number). Products returned without an RMA number will be refused. Highlite will not accept the returned goods or any responsibility. Call Highlite 0031-455667723 or mail [offersales@highlite.nl](mailto:offersales@highlite.nl) and request an RMA prior to shipping the fixture. Be prepared to provide the model number, serial number and a brief description of the cause for the return. Be sure to properly pack fixture, any shipping damage resulting from inadequate packaging is the customer's responsibility. Highlite reserves the right to use its own discretion to repair or replace product(s). As a suggestion, proper UPS packing or double-boxing is always a safe method to use.

**Note: If you are given an RMA number, please include the following information on a piece of paper inside the box:**

- 01) Your name
- 02) Your address
- 03) Your phone number
- 04) A brief description of the symptoms

### **Claims**

The client has the obligation to check the delivered goods immediately upon delivery for any shortcomings and/or visible defects, or perform this check after our announcement that the goods are at their disposal. Damage incurred in shipping is the responsibility of the shipper; therefore the damage must be reported to the carrier upon receipt of merchandise.

It is the customer's responsibility to report and submit claims with the shipper in the event that a fixture is damaged due to shipping. Transportation damage has to be reported to us within one day after receipt of the delivery.

Any return shipment has to be made post-paid at all times. Return shipments must be accompanied with a letter defining the reason for return shipment. Non-prepaid return shipments will be refused, unless agreed otherwise in writing.

Complaints against us must be prepared in writing or sent by fax within 10 working days after receipt of the invoice. After this period complaints will not be handled anymore.

Complaints will only then be considered if the client has so far complied with all parts of the agreement, regardless of the agreement from which the obligation is resulting.

## Description of the device

### Features

The LED Par 64 COB RGBW is a compact light effect with high output and great effects.

- Light source: 1 x 200W RGBW COB LED
- Preprogrammed LEE color presets
- Compact size
- Wash fixture with latest technology LED source
- High-power light output with rich hues and smooth color mixing for stage and wall washing
- Double bracket for easy and versatile installation
- Due to the special design of the mirror it is possible to project a light beam up to 66 degree's without getting different color shades or high spots on the projected surface
- 3 menu buttons + LCD Display for easy setup
- Input voltage: 100-240V, 60/50Hz
- Refresh rate: 400Hz
- Power consumption: 210W max @FO
- DMX channels: 4, 8 or 15 channels
- Lux @2m: 3774 Lux, R: 552, G: 1371, B: 215, W: 1971
- Max distance: 20m
- Control modes: Built-in programs, DMX, Manual color control
- Control protocol: DMX-512
- Dimmer: 0-100%
- Strobe: 0-20Hz
- Beam Angle: 66°
- Protection rate: IP-20
- Cooling: Forced Cooling (Fan)
- Connections: Pro Power connector IN/OUT & 3-pin XLR IN & OUT
- Fuse: T3,15AL/250V
- Dimensions: 280 x 268 x 382 mm (LxWxH)
- Weight: 3,52 kg

### Frontside


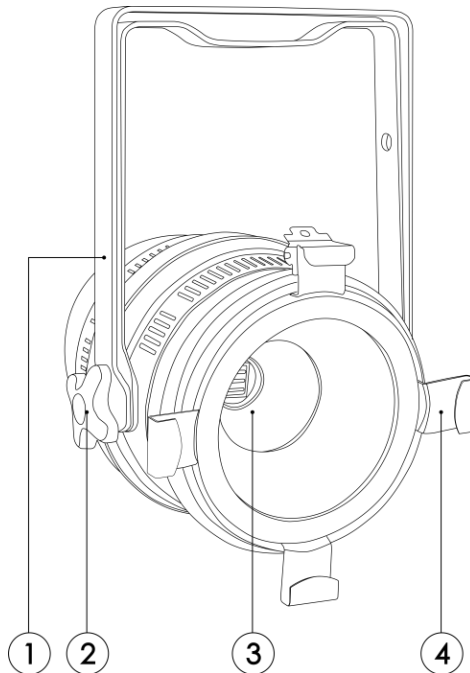


Fig. 01

- 01) Mounting bracket with inclination screw
- 02) Adjustment screw
- 03) 1 x 200W RGBW COB LED
- 04) Color frame retaining clip

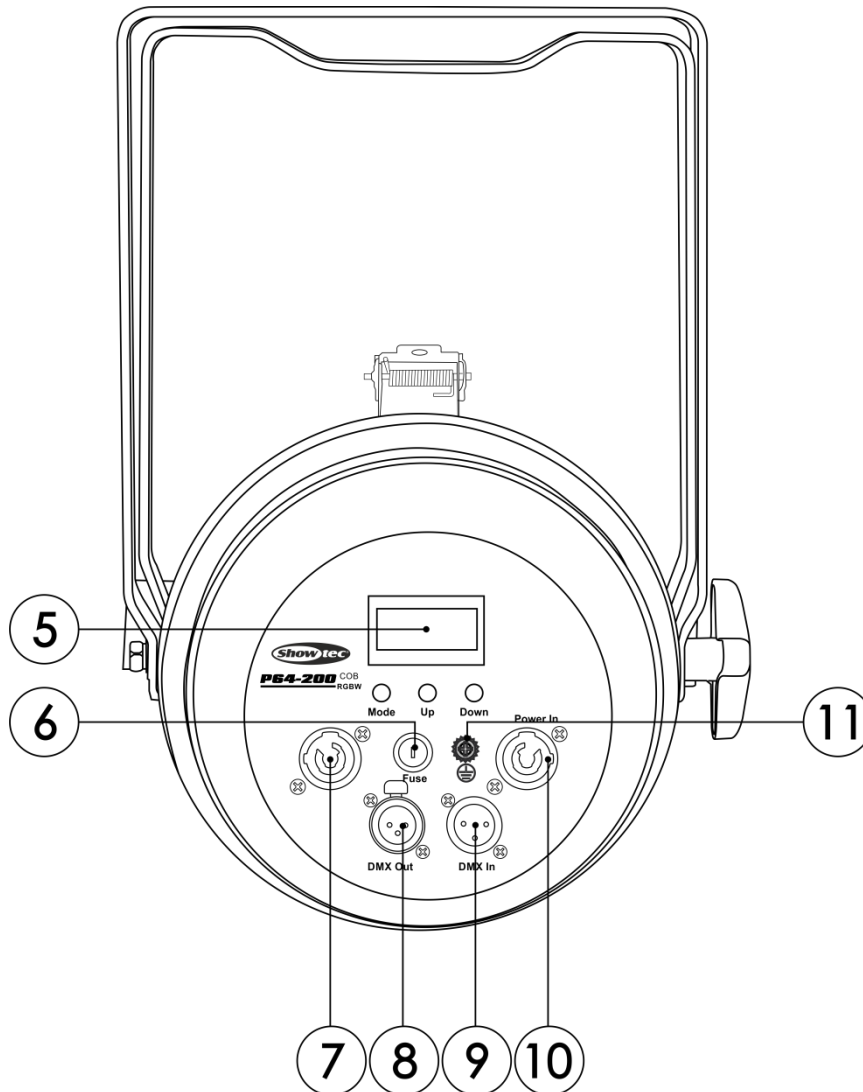

**Backside****Fig. 02**

- 05) LCD Display + 3 Menu buttons
- 06) Fuse T3,15A/250V
- 07) Grey Pro Power connector OUT
- 08) 3-pin DMX signal connector OUT
- 09) 3-pin DMX signal connector IN
- 10) Blue Pro Power connector IN
- 11) Ground/Earth connection

**Installation**

Remove all packing materials from the LED Par 64 COB RGBW. Check if all foam and plastic padding is removed. Connect all cables.

**Do not supply power before the whole system is set up and connected properly.**

**Always disconnect from electric mains power supply before cleaning or servicing.**

**Damages caused by non-observance are not subject to warranty.**

**Set Up and Operation**

Follow the directions below, as they pertain to your preferred operation mode.

Before plugging the unit in, always make sure that the power supply matches the product specification voltage. Do not attempt to operate a 120V specification product on 230V power, or vice versa.

Connect the device to the main power supply.

## Control Modes

There are 3 modes:


- Built-in programs
- Manual Mode
- DMX-512 (4CH, 8CH or 15CH)

### One LED Par (Built-in programs and Manual Mode)

- 01) Fasten the effect light to a firm trussing. Leave at least 0,5 meter on all sides for air circulation.
- 02) Always use a safety cable (ordercode 70140 / 70141).
- 03) Plug the end of the electric mains power cord into a proper electric power supply socket.
- 04) When the LED Par is not connected with a DMX cable, it functions as a stand-alone device.  
Please see page 13+14 for more information about the Built-in programs and Manual Mode.


### Multiple LED Pars (DMX Control)

- 01) Fasten the effect light to a firm trussing. Leave at least 0,5 meter on all sides for air circulation.
- 02) Always use a safety cable (ordercode 70140 / 70141).
- 03) Use a 3-pin XLR cable to connect the LED Pars and other devices.

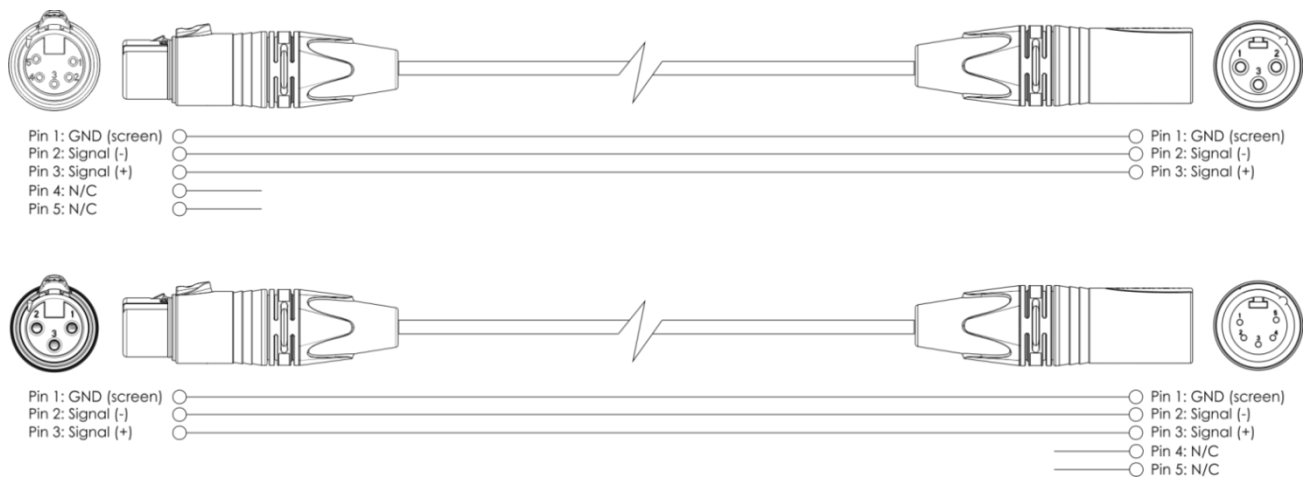

- 04) Link the units as shown in fig. 03. Connect the first unit's DMX "out" socket with the second unit's "in" socket, using a DMX-signal cable. Repeat this process to link the second, third, and fourth units.
- 05) Supply electric power: Plug electric mains power cords into each unit's Pro Power socket, then plug the other end of the mains power cord into proper electric power supply sockets, starting with the first unit. Do not supply power before the whole system is set up and connected properly.

### Multiple LED Pars DMX Set Up

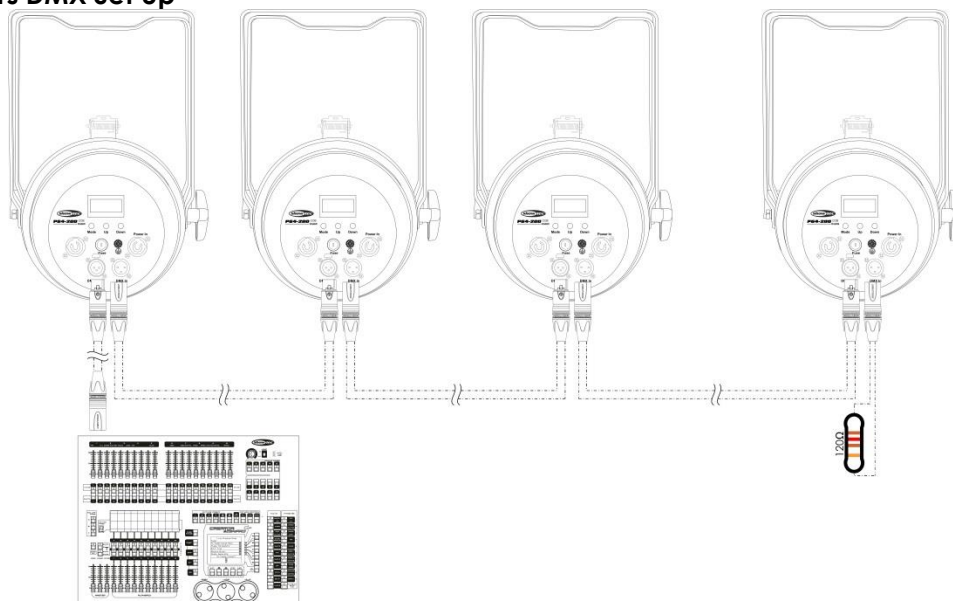


Note : Link all cables before connecting electric power

Fig. 03

## Fixture Linking

You will need a serial data link to run light shows of one or more fixtures using a DMX-512 controller. The combined number of channels required by all the fixtures on a serial data link determines the number of fixtures the data link can support.

**Important:** Fixtures on a serial data link must be daisy-chained in a single line. To comply with the EIA-485 standard, no more than 30 devices should be connected on one data link. Connecting more than 30 fixtures on one serial data link without the use of a DMX optically isolated splitter may result in deterioration of the digital DMX signal.

 Maximum recommended DMX data link distance: 100 meters  
Maximum recommended number of fixtures on a DMX data link: 30 fixtures  
Maximum recommended number of LED Pars on a power link: 8 fixtures @110V  
Maximum recommended number of LED Pars on a power link: 16 fixtures @240V

## Data Cabling


To link fixtures together, you must obtain data cables. You can purchase DAP Audio certified DMX cables directly from a dealer/distributor or construct your own cable. If you choose to create your own cable, please use data-grade cables that can carry a high quality signal and are less prone to electromagnetic interference.

### DAP Audio DMX Data Cables

- DAP Audio Basic microphone cable for allround use. bal. XLR/M 3-pin > XLR/F 3-pin. **Ordercode** FL01150 (1,5 m), FL013 (3 m), FL016 (6 m), FL0110 (10 m), FL0115 (15 m), FL0120 (20 m).
- DAP Audio X-type data cable XLR/M 3-pin > XLR/F 3-pin. **Ordercode** FLX0175 (0,75 m), FLX01150 (1,5 m), FLX013 (3 m), FLX016 (6 m), FLX0110 (10 m).
- DAP Audio cable for the demanding user with exceptional audio-qualities and connector made by Neutrik®. **Ordercode** FL71150 (1,5 m), FL713 (3 m), FL716 (6 m), FL7110 (10 m).
- DAP Audio cable for the demanding user with exceptional audio-qualities and connector made by Neutrik®. **Ordercode** FL7275 (0,75 m), FL72150 (1,5 m), FL723 (3 m), FL726 (6 m), FL7210 (10 m).
- DAP Audio 110 Ohm cable with digital signal transmission. **Ordercode** FL0975 (0,75 m), FL09150 (1,5 m), FL093 (3 m), FL096 (6 m), FL0910 (10 m), FL0915 (15 m), FL0920 (20 m).

The LED Par 64 COB RGBW can be operated with a controller in **control mode** or without the controller in **stand-alone mode**.

### Control Panel

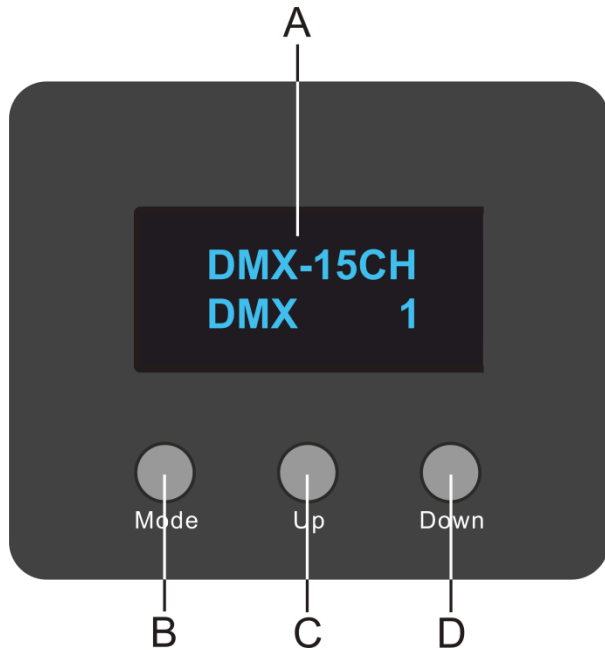

- A) LED display
- B) MODE button
- C) UP button
- D) DOWN button

**Fig. 04**

### Control Mode

The fixtures are individually addressed on a data-link and connected to the controller. The fixtures respond to the DMX signal from the controller. (When you select the DMX address and save it, the controller will display the saved DMX address, next time.)

### DMX Addressing

The control panel on the front side of the base allows you to assign DMX fixture addresses, which is the first channel with which the LED Par will respond to the controller.

Please note, when you use the controller, the unit has **15** channels.

When using multiple LED Pars, make sure you set the DMX addresses right.

Therefore, the DMX address of the first LED Par should be **1(001)**; the DMX address of the second LED Par should be **1+15=16 (016)**; the DMX address of the third LED Par should be **16+15=31 (031)**, etc. Please, be sure that you do not have any overlapping channels in order to control each LED Par correctly.

If two or more LED Pars are addressed similarly, they will work similarly.

### Controlling:

After having addressed all LED Par fixtures, you may now start operating these via your lighting controller.

**Note:** After switching on, the LED Par will automatically detect whether DMX 512 data is received or not.


If there is no data received at the DMX-input, the “**LED**” on the control panel will not flash.

If not, the problem may be:


- The XLR cable from the controller is not connected with the input of the LED Par 64 COB RGBW.
- The controller is switched off or defective, the cable or connector is defective, or the signal wires are swapped in the input connector.

**Note:** It is necessary to insert an XLR termination plug (with 120 Ohm) in the last fixture in order to ensure proper transmission on the DMX data link.

Menu Overview

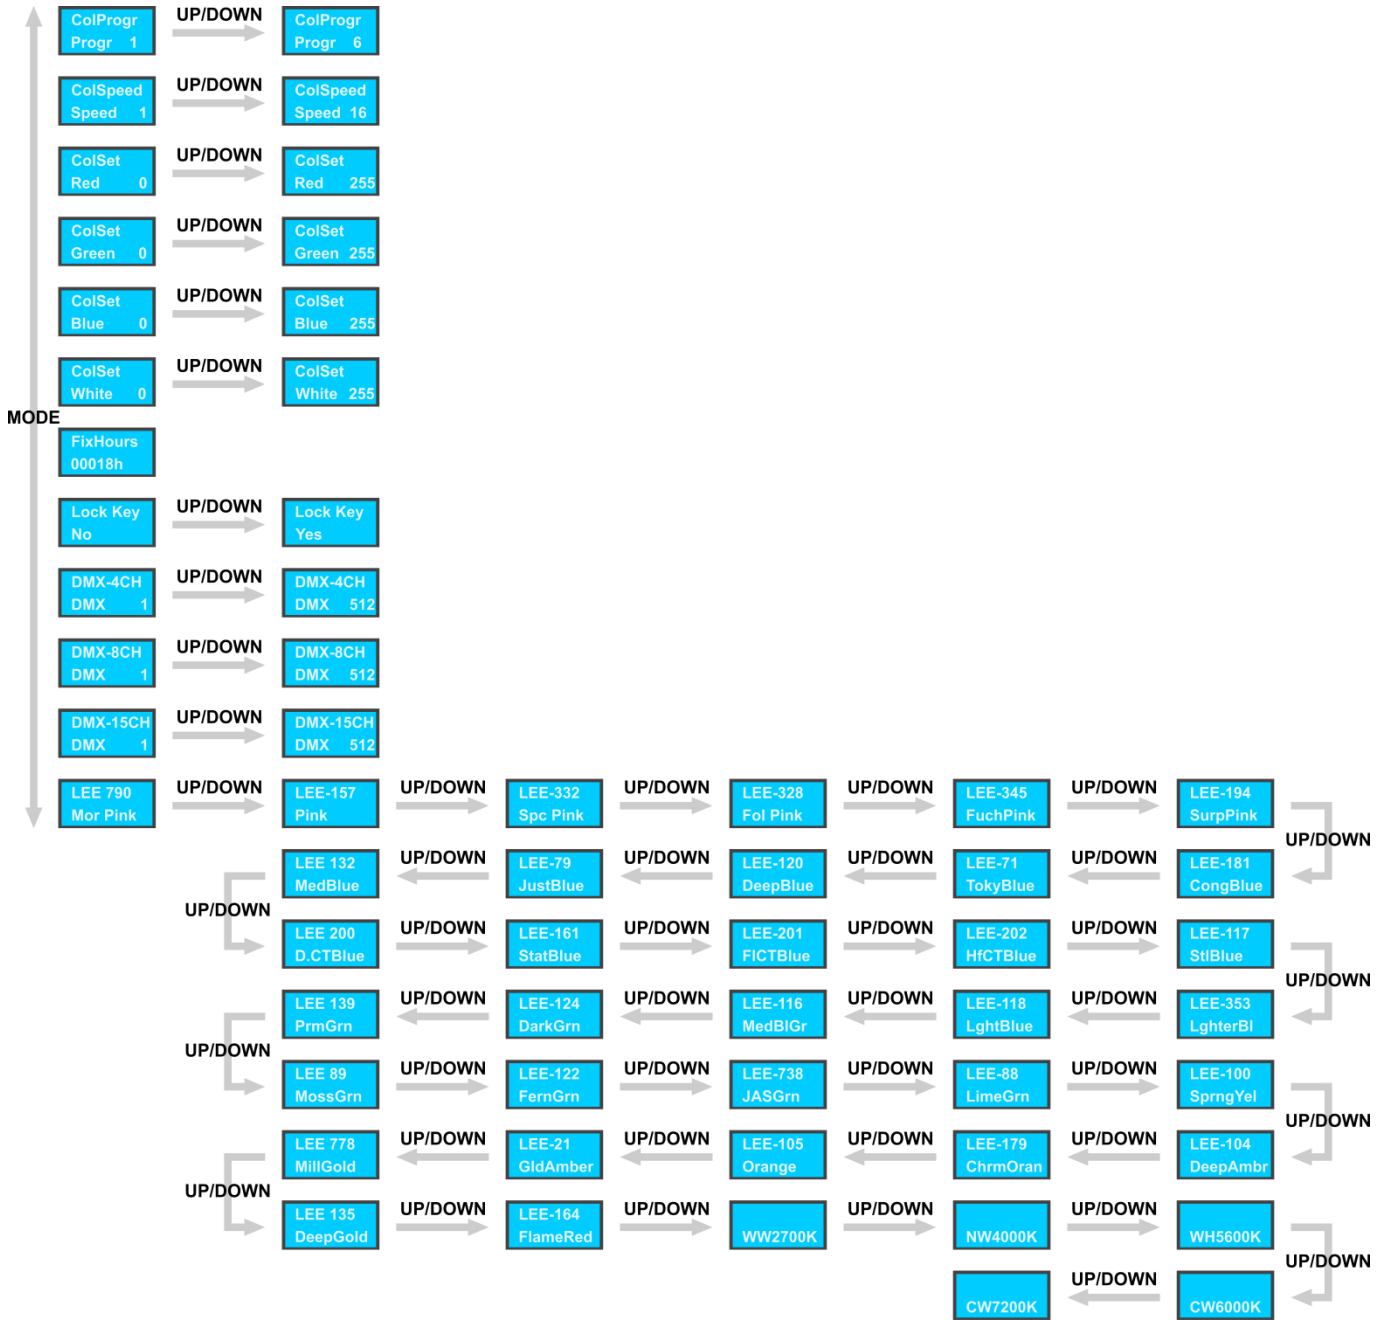

The LED Par 64 COB RGBW will only show its version number at start-up !




## Main Menu Options

ColProgr Progr 1	DMX-512 Mode
ColSpeed Speed 1	Channel Mode
ColSet Red 0	Program Speed
ColSet Green 0	Built-in programs
ColSet Blue 0	Sound-controlled Mode
ColSet White 0	Static Color Mode
FixHours 00018h	Strobe
Lock Key No	Red
DMX-4CH DMX 1	Green
DMX-8CH DMX 1	Blue
DMX-15CH DMX 1	White
LEE 790 Mor Pink	Color Mode (LEE + Kelvin)

The LED Par 64 will automatically detect the presence of a DMX signal. In order to receive a DMX signal, the controller must be attached to a DMX controller by a 3-pin DMX cable and the DMX controller must be turned on. The LED Par 64 system can operate as a 4, 8 or 15-channel DMX fixture.


### 1. Built-in Programs

With this menu you can set your desired built-in program mode.

- 01) Press the **MODE** button, until the display shows .
- 02) Press the **Up/Down** buttons to choose 6 different programs.


### 2. Program Speed

With this menu you can set your desired speed of the built-in programs.

- 01) Press the **MODE** button, until the display shows .
- 02) Press the **Up/Down** buttons to choose 16 different speed settings. 1 is slowest, 16 is fastest and sound-controlled.


### 3. Dimmer Red

With this menu you can set your desired dim value.

- 01) Press the **MODE** button, until the display shows .
- 02) Press the **Up/Down** buttons to choose 255 different dimmer settings.


#### 4. Dimmer Green

With this menu you can set your desired dim value.

- 01) Press the **MODE** button, until the display shows  .
- 02) Press the **Up/Down** buttons to choose 255 different dimmer settings.


#### 5. Dimmer Blue

With this menu you can set your desired dim value.

- 01) Press the **MODE** button, until the display shows  .
- 02) Press the **Up/Down** buttons to choose 255 different dimmer settings.


#### 6. Dimmer White

With this menu you can set your desired dim value.

- 01) Press the **MODE** button, until the display shows  .
- 02) Press the **Up/Down** buttons to choose 255 different dimmer settings.




#### 7. Fixture Hours

With this menu you can keep track of the operating time.

- 01) Press the **MODE** button, until the display shows  .
- 02) Now you can keep track of the operating time of your LED Par 64 COB.

#### 8. Lock Key

With this menu, you can activate/deactivate a display lock.

- 01) Press the **MODE** button, until the display shows    .
- 02) Press the **UP/DOWN** buttons to activate/deactivate a display lock.
- 03) If you choose "Yes" and the display turns OFF after 10 seconds, you will have to press and hold down one of the menu buttons (**MODE, UP/DOWN**) for 3 seconds. The display will turn ON.
- 04) If you choose "No", the display will remain continuously ON.

#### 9. DMX 4-channel mode

With this menu, you can set the DMX address in 4-channel mode.

- 01) Press the **MODE** button until the display shows  .
- 02) Press the **UP/DOWN** buttons to set the desired DMX address. The adjustment range is between 1-512.

#### 10. DMX 8-channel mode

With this menu, you can set the DMX address in 8-channel mode.

- 01) Press the **MODE** button until the display shows  .
- 02) Press the **UP/DOWN** buttons to set the desired DMX address. The adjustment range is between 1-512.

#### 11. DMX 15-channel mode

With this menu, you can set the DMX address in 15-channel mode.


- 01) Press the **MODE** button until the display shows  .
- 02) Press the **UP/DOWN** buttons to set the desired DMX address. The adjustment range is between 1-512.

**12. Color Mode (LEE + Kelvin)**

With this menu, you can set a specific color.

01) Press the **MODE** button until the display shows **LEE 790 Mor Pink**.

02) Press the **UP/DOWN** buttons to choose one of the following 38 color presets:

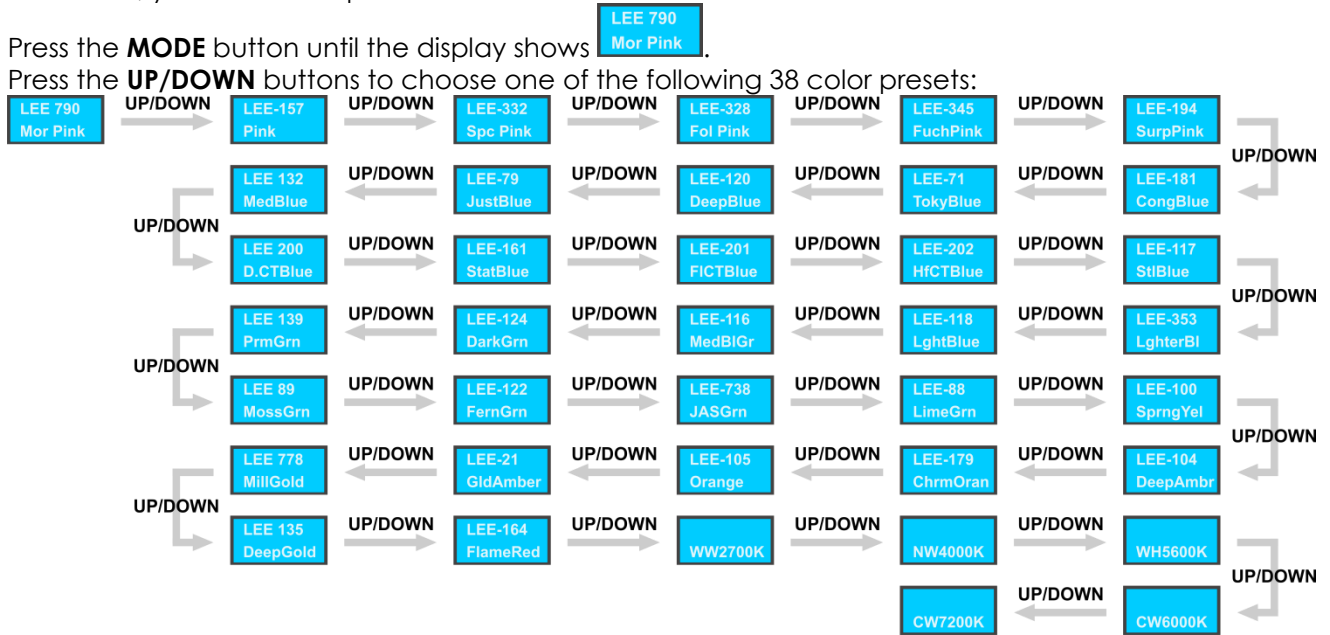

**DMX Channels**

**4 channels**

**Channel 1 – Red**

0-255 Gradual adjustment Red, from 0-100%

**Channel 2 – Green**

0-255 Gradual adjustment Green, from 0-100%

**Channel 3 – Blue**

0-255 Gradual adjustment Blue, from 0-100%

**Channel 4 – White**

0-255 Gradual adjustment White, from 0-100%



**8 channels****Channel 1 – Dimmer intensity**

0-255 Gradual adjustment, from dark to brightest 0-100%

**Channel 2 – Red  Dimmer must be open **

0-255 Gradual adjustment Red, from 0-100%

**Channel 3 – Green  Dimmer must be open **

0-255 Gradual adjustment Green, from 0-100%

**Channel 4 – Blue  Dimmer must be open **

0-255 Gradual adjustment Blue, from 0-100%

**Channel 5 – White  Dimmer must be open **

0-255 Gradual adjustment White, from 0-100%

**Channel 6 – Color Macros**

0-13 Not functional

14-255 Macro Mode

**Channel 7 – Strobe**

0-15 Closed

16-255 Strobe flash frequency, from slow to fast

**Channel 8 – Dim Curve**

0-255 Dim Curve Control

**15 channels****Channel 1 – Dimmer intensity**

0-255 Gradual adjustment, from dark to brightest 0-100%

**Channel 2 – Dimmer Fine**

0-255 Gradual adjustment, from dark to brightest 0-100%

**Channel 3 – Red  Dimmer must be open **

0-255 Gradual adjustment Red, from 0-100%

**Channel 4 – Red Fine  Dimmer must be open **

0-255 Gradual adjustment Red, from 0-100%

**Channel 5 – Green  Dimmer must be open **

0-255 Gradual adjustment Green, from 0-100%

**Channel 6 – Green Fine  Dimmer must be open **

0-255 Gradual adjustment Green, from 0-100%

**Channel 7 – Blue  Dimmer must be open **

0-255 Gradual adjustment Blue, from 0-100%

**Channel 8 – Blue Fine** ⚠️ **Dimmer must be open** ⚠️

0-255 Gradual adjustment Blue, from 0-100%

**Channel 9 – White** ⚠️ **Dimmer must be open** ⚠️

0-255 Gradual adjustment White, from 0-100%

**Channel 10 – White Fine** ⚠️ **Dimmer must be open** ⚠️

0-255 Gradual adjustment White, from 0-100%

**Channel 11 – Color Macros**

0-13 Not functional

14-255 Macro Mode

**Channel 12 – Strobe**

0-15 Closed

16-255 Strobe flash frequency, from slow to fast

**Channel 13 – Dim Curve**

0-255 Dim Curve Control

**Channel 14 – Mode**

0-35 Color Adjustment

36-71 Slow Fade in to OFF

72-107 ON to slow fade out

108-143 Slow Fade in to slow Fade out

144-179 Automatic color mixing

180-215 3-color switch

216-251 7-color switch

252-255 7-color sound controlled

**Note:**

When CH14 is set between 0-143: Use in combination with CH1-CH11 to select your color

When CH14 is set between 144-251: Use in combination with CH15 to set the speed

**Channel 15 – Speed (when CH14 is set between 36-251)**

0-255 Speed, from slow to fast

## Maintenance

---

The operator has to make sure that safety-related and machine-technical installations are to be inspected by an expert after every year in the course of an acceptance test.

The operator has to make sure that safety-related and machine-technical installations are to be inspected by a skilled person once a year.

The following points have to be considered during the inspection:

- 01) All screws used for installing the device or parts of the device have to be tightly connected and must not be corroded.
- 02) There may not be any deformations on housings, fixations and installation spots.
- 03) Mechanically moving parts like axles, eyes and others may not show any traces of wearing.
- 04) The electric power supply cables must not show any damages or material fatigue.

The LED Par 64 COB RGBW requires almost no maintenance. However, you should keep the unit clean. Otherwise, the fixture's light-output will be significantly reduced. Disconnect the mains power supply, and then wipe the cover with a damp cloth. Do not immerse in liquid. Wipe lens clean with glass cleaner and a soft cloth. Do not use alcohol or solvents.

The front lens will require weekly cleaning, as smoke-fluid tends to build up residues, reducing the light-output very quickly.

Keep connections clean. Disconnect electric power, and then wipe the DMX and audio connections with a damp cloth. Make sure connections are thoroughly dry before linking equipment or supplying electric power.

## Replacing the Fuse

Power surges, short-circuit or inappropriate electrical power supply may cause a fuse to burn out.

If the fuse burns out, the product will not function whatsoever. If this happens, follow the directions below:

- 01) Unplug the unit from electric power source.
- 02) Insert a flat-head screwdriver into a slot in the fuse cover. Turn the screwdriver to the left, at the same time gently push a bit (Turn and Push). The fuse will come out.
- 03) Remove the used fuse. If brown or unclear, it is burned out.
- 04) Insert the replacement fuse into the holder. Reinsert the fuse cover. Be sure to use a fuse of the same type and specification. See the product specification label for details.

## Troubleshooting

---

This troubleshooting guide is meant to help solve simple problems.

If a problem occurs, carry out the steps below in sequence until a solution is found. Once the unit operates properly, do not carry out following steps.

### No Light

If the light effect does not operate properly, refer servicing to a technician.

Suspect three potential problem areas as: the power supply, the LED, the fuse.

- 01) Power supply. Check that the unit is plugged into an appropriate power supply.
- 02) The LED. Return the LED Par to your Showtec dealer.
- 03) The fuse. Replace the fuse. See page 18 for replacing the fuse.
- 04) If all of the above appears to be O.K., plug the unit in again.
- 05) If you are unable to determine the cause of the problem, do not open the LED Par, as this may damage the unit and the warranty will become void.
- 06) Return the device to your Showtec dealer.

**No Response to DMX**

Suspect the DMX cable or connectors, a controller malfunction, a light effect DMX card malfunction.

- 01) Check the DMX setting. Make sure that DMX addresses are correct.
- 02) Check the DMX cable: Unplug the unit; change the DMX cable; then reconnect to electrical power. Try your DMX control again.
- 03) Determine whether the controller or light effect is at fault. Does the controller operate properly with other DMX products? If not, take the controller in for repair. If so, take the DMX cable and the light effect to a qualified technician.

<b>Problem</b>	<b>Probable cause(s)</b>	<b>Solution</b>
One or more fixtures do not function at all	No power to the fixture	<ul style="list-style-type: none"> <li>• Check if power is switched on and cables are plugged in</li> </ul>
	Primary fuse blown	<ul style="list-style-type: none"> <li>• Replace fuse</li> </ul>
Fixtures reset correctly, but all respond erratically or not at all to the controller	The controller is not connected.	<ul style="list-style-type: none"> <li>• Connect controller.</li> </ul>
	3-pin XLR Out of the controller does not match XLR Out of the first fixture on the link (i.e. signal is reversed)	<ul style="list-style-type: none"> <li>• Install a phase reversing cable between the controller and the first fixture on the link</li> </ul>
Fixtures reset correctly, but some respond erratically or not at all to the controller	Poor data quality	<ul style="list-style-type: none"> <li>• Check data quality. If much lower than 100 percent, the problem may be a bad data link connection, poor quality or broken cables, missing termination plug, or a defective fixture disturbing the link</li> </ul>
	Bad data link connection	<ul style="list-style-type: none"> <li>• Inspect connections and cables. Correct poor connections. Repair or replace damaged cables</li> </ul>
	Data link not terminated with 120 Ohm termination plug	<ul style="list-style-type: none"> <li>• Insert termination plug in output jack of the last fixture on the link</li> </ul>
	Incorrect addressing of the fixtures	<ul style="list-style-type: none"> <li>• Check address setting</li> </ul>
	One of the fixtures is defective and disturbs data transmission on the link	<ul style="list-style-type: none"> <li>• Bypass one fixture at a time until normal operation is restored: unplug both connectors and connect them directly together.</li> <li>• Have the defective fixture serviced by a qualified technician</li> </ul>
	3-pin XLR Out on the fixtures does not match (pins 2 and 3 reversed)	<ul style="list-style-type: none"> <li>• Install a phase-reversing cable between the fixtures or swap pin 2 and 3 in the fixture that behaves erratically</li> </ul>
No light or lamp cuts out intermittently	Fixture is too hot	<ul style="list-style-type: none"> <li>• Allow the fixture to cool down</li> <li>• Clean the fan</li> <li>• Make sure air vents in control panel and the front lens are not blocked</li> <li>• Turn up the air conditioning</li> </ul>
	LEDs damaged	<ul style="list-style-type: none"> <li>• Disconnect the fixture and return it to your dealer</li> </ul>
	The power supply settings do not match local AC voltage and frequency	<ul style="list-style-type: none"> <li>• Disconnect fixture. Check settings and correct if necessary</li> </ul>

## Product Specifications

Model:	Showtec LED Par 64 COB RGBW
Input Voltage:	100-240 VAC, 60/50Hz
Power consumption:	210W max @FO
Refresh rate	400Hz
DMX linking:	30pcs
Protection rate:	IP-20
Fuse:	T3,15AL/250V
Dimensions:	282 x 270 x 385 mm (LxWxH)
Weight:	3,52 kg
<b>Operating and Programming:</b>	
Signal pin OUT:	Pin 1 (earth), pin 2 (-), pin 3 (+)
DMX Mode:	4, 8 or 15 channels
Signal input:	3-pin DMX IN
Signal output:	3-pin DMX OUT
<b>Electro-mechanical effects:</b>	
LED Quantity:	1 x 200W RGBW COB LED
Lux @2m:	3774 Lux, R: 552, G: 1371, B: 215, W: 1971
Max distance:	20m
Color mixing:	RGBW
Beam angle:	66°
Dimmer:	0-100%
Strobe:	0-20Hz
Housing:	Metal
DMX-control:	via standard DMX-controller
On Board:	LED display for easy setup
Control:	Built-in programs, DMX, Manual Color control
Connections:	Pro Power connector IN/OUT & 3-pin XLR IN & OUT
Cooling:	Forced Cooling (Fan)
Max. ambient temperature $t_a$ :	40°C
Max. housing temperature $t_B$ :	80°C
<b>Minimum distance:</b>	
Minimum distance from flammable surfaces:	0,5 m
Minimum distance to lighted object:	1 m




Design and product specifications are subject to change without prior notice.



Website: [www.Showtec.info](http://www.Showtec.info)

Email: [service@highlite.nl](mailto:service@highlite.nl)

## Dimensions

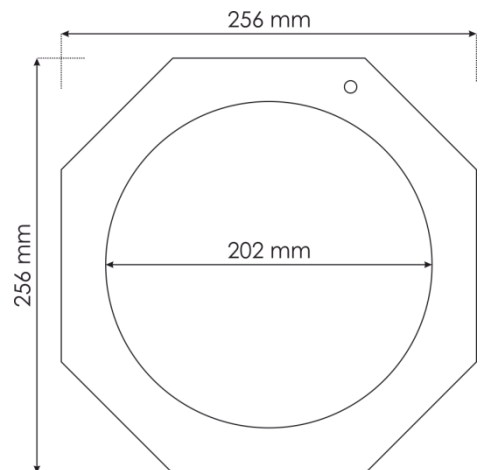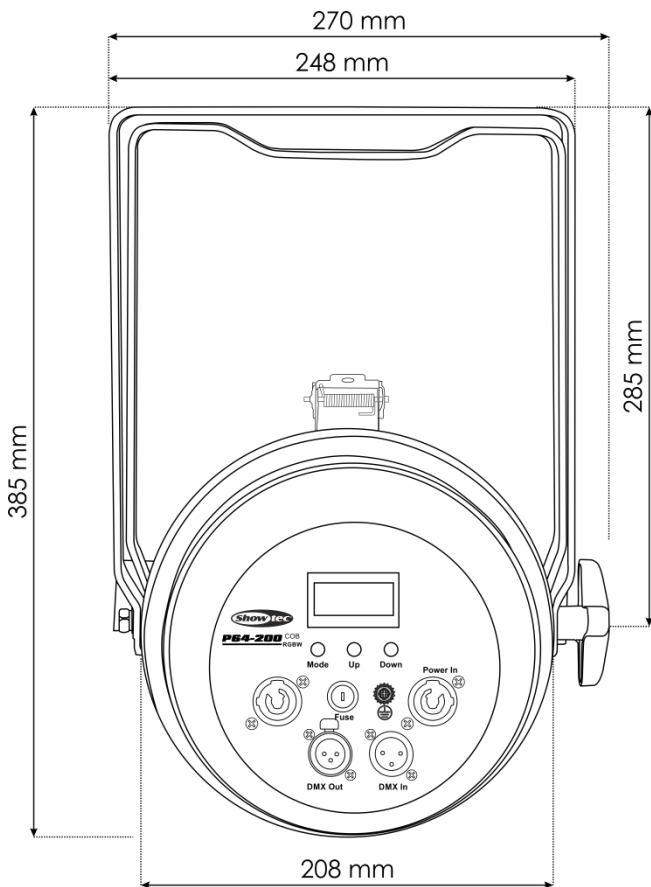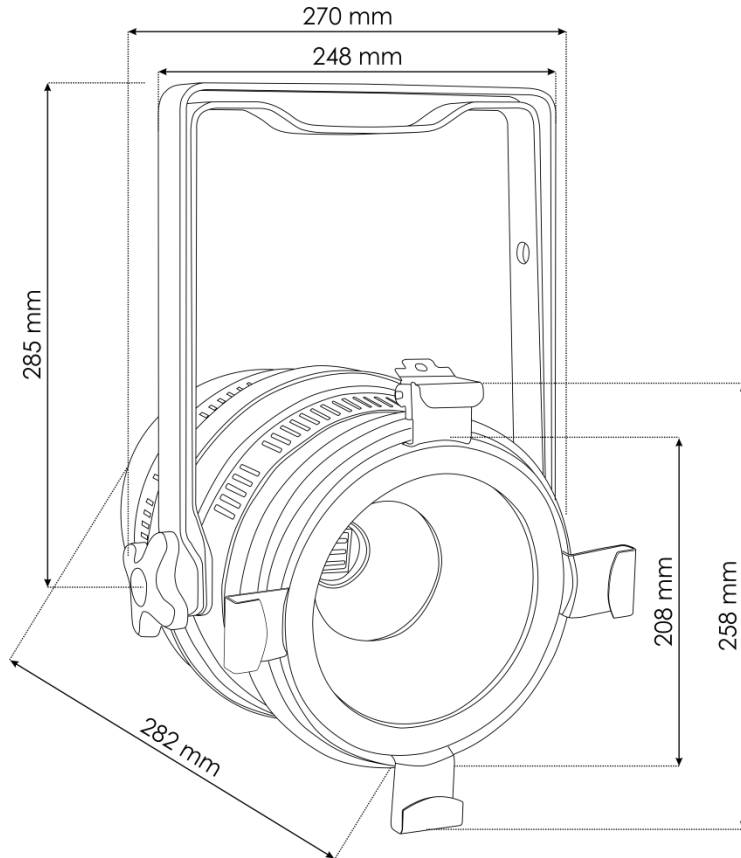





©2015 Showtec