




GE
Lighting

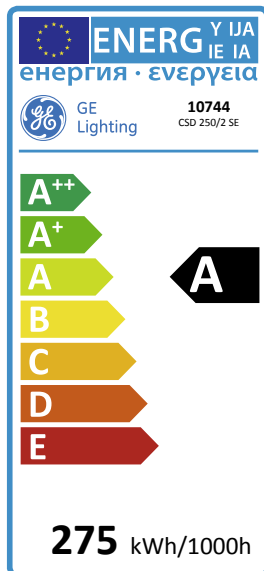

275
kWh/1000h

A
energy class

71
lumens/watt

Discharge - Single Ended Cold Start

CSD 250/2 SE

10744

Product information

Compact, single ended metal halide cold start lamps for a variety of applications requiring high luminance, reliability and excellent colour characteristics. Excellent colour rendering Ra from 70 – 90+- High CCT 7200 - 9000 K with superior colour stability -Universal burn position -Dimmable with stable colour- High efficiency with excellent lumen maintenance .

Application areas



Event and Tour



Product data

Cap/Base	GY9.5
Bulb Shape	Tubular
Bulb Finish	Clear
Light Center Length [mm]	55
Net weight per piece [g]	32
Gross weight per piece [g]	41
Operating position	U - Universal
Brand	General Electric (GE)

Performance data

Colour Code	790
Colour Rendering Index (CRI) [Ra]	75
Nominal correlated colour temperature (CCT) [K]	9000
Nominal lumens [lm]	17700
Energy efficiency class (EEC)	A
Nominal chromaticity coordinate X	0.287
Nominal chromaticity coordinate Y	0.296
Weighted energy consumption [kWh/1000h]	275

Electrical data

Nominal power [W]	250
Nominal lamp voltage [V]	95
Dimming Capability	No
Ballast Required	Yes

Logistic data

DUN Code	10043168107447
EAN Code	0043168107440
Pack Quantity	10
Inner pack type	BOX
Outer pack type	OUTER BOX
Layer quantity	210 EUR, 520 UK
Layer quantity EUR	210
Layer quantity UK	520
Pallet quantity EUR (PC)	2100
Pallet quantity UK (PC)	2600
Outer case size	240 x 175 x 95 (mm)
Product status	Available

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Entertainment Solution Spectrum Catalogue \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)

Disclaimer

Special Purpose Lamp, Not suited for household illumination