
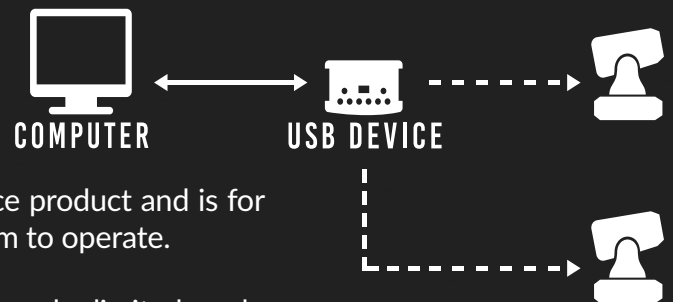


LP 512

USB to DMX Device

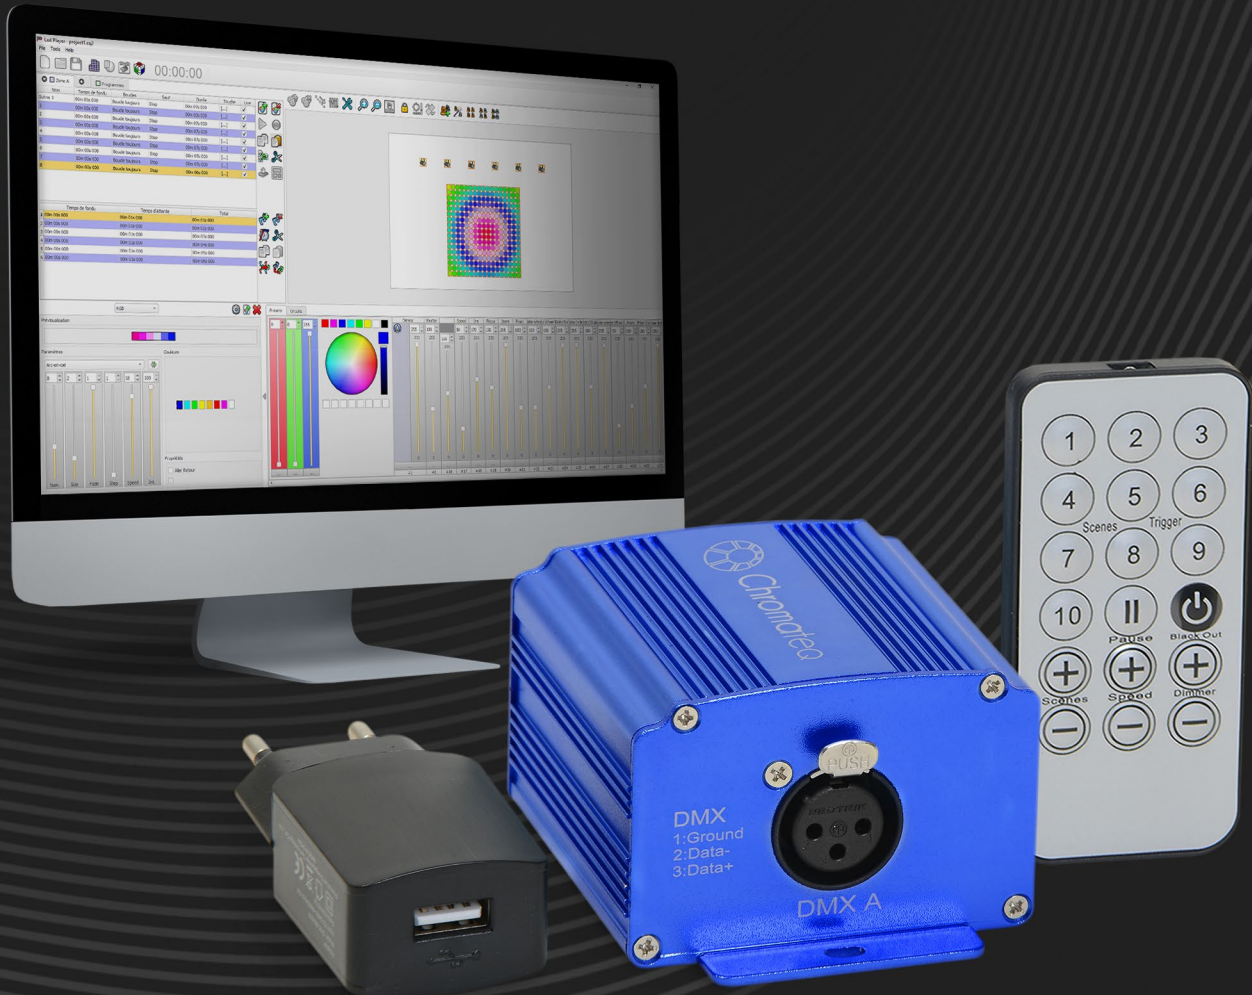


The LP512 controller is our professional entry-level price product and is for all users who are looking for an easy DMX control system to operate.

The package works with the Player and Pro Software under limited mode and have some trigger options. Infrared remote control and USB V power supply unit are included in the package.

10th
YEAR
ANNIVERSARY

3
YEAR
WARRANTY



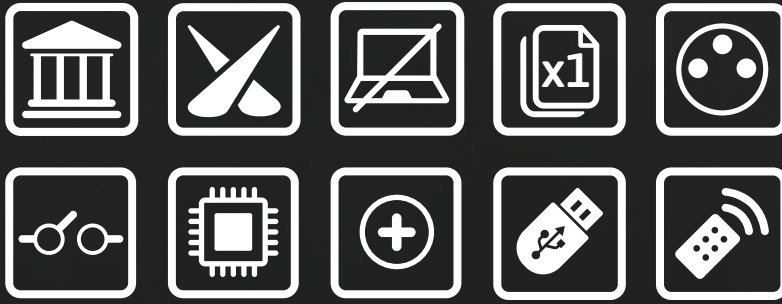

HARDWARE Options

DMX Output Zone	512 In/Out channels PC and 512 Out Stand Alone 1 Zone, play 1 scene/sequence a time in Stand Alone
Memory	Internal memory (200 Kb, 2000 to 200 DMX step capacity)
DMX Modes	DMX In/Out, DMX record, DMX trigger
Stand Alone Options	16 bits and fine channel management Cross Fade time between scenes Default start scene when power up
Triggers	4 Dry Contacts on 3~5V (On, On/Off, Release, Restart, Scene Priority) Infrared receiver (with IR remote control included) 10 scene selection, scene speed, general dimmer and next scene 1 NEXT button for scene selection
Power	5 V. DC USB Power (Power supply unit included)
Dimension	H: 48 mm (1,89 in) / W: 70 mm (2,76 in) / D: 89 mm (3,5 in)
Housing	Strong Aluminum
I/O Connectors	Mini USB 2.0, 3 pin XLR (XLR5 optional)
Operating Temperature	-40 to +85 C°
IP Rating	IP40
Certifications	CE, LVD, RoHS
International Warranty	3 years



SOFTWARE Options

LED Player	Up to 64x512 DMX Outputs	FREE SOFTWARE Download and Update 
Pro DMX	100 DMX Outputs	
Studio DMX	3D viewer in real time, Full mode	
Wi-Light	Software control (Android, iOS)	
Art-Net Output from PC	1x512 DMX Outputs per connected device	
System Compatibility	Windows, iOS, Linux	
Technical support	Worldwide, English, French, Chinese	

Contact, support, download
from www.chromateq.com

PC minimum configuration:
Windows / Mac OS / Linux(Device)
2Ghz CPU, 8 Gb RAM
2Gb RAM graphic card
500 Mb disk
1 USB port (Device)
1 Ethernet port (ART-Net out/CQSA-E)

