




GE
Lighting

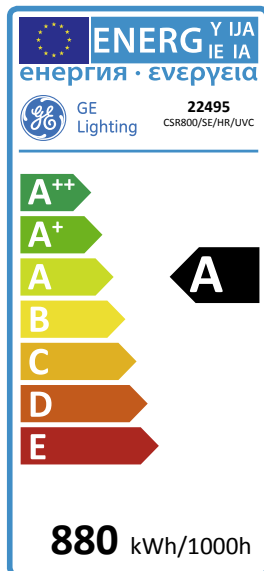

880
kWh/1000h

A
energy class

80
lumens/watt

Discharge - Single Ended Hot Restrike

CSR800/SE/HR/UVC

22495

Product information

Compact, single ended metal halide hot restrike lamps for a variety of applications requiring high luminance, reliability and excellent colour characteristics. Excellent colour rendering, Ra>90, and high CCT 5600-6000 K with superior colour stability- Universal burn position with hot restrike capability- High efficiency with excellent lumen maintenance -Available with UV blocking.

Application areas

Film and Broadcast



Product data

Cap/Base	G22
Bulb Shape	Globe
Bulb Finish	Clear
Bulb Diameter [mm]	30
Maximum Overall Length [mm]	145
Light Center Length [mm]	70
Arc Gap	8
Net weight per piece [g]	190
Gross weight per piece [g]	213
Operating position	U - Universal
Brand	General Electric (GE)

Performance data

Colour Code	956
Colour Rendering Index (CRI) [Ra]	90
Nominal correlated colour temperature (CCT) [K]	5600
Nominal lumens [lm]	64000
Energy efficiency class (EEC)	A
Nominal chromaticity coordinate X	0.323
Nominal chromaticity coordinate Y	0.318
Weighted energy consumption [kWh/1000h]	880

Electrical data

Nominal power [W]	800
Nominal lamp voltage [V]	95
Lamp Current [A]	8.4
Dimming Capability	No
Ballast Required	Yes

Logistic data

DUN Code	10043168224953
EAN Code	0043168224956
Pack Quantity	10
Inner pack type	BOX
Outer pack type	OUTER BOX
Layer quantity	100 EUR, 130 UK
Layer quantity EUR	100
Layer quantity UK	130
Pallet quantity EUR (PC)	600
Pallet quantity UK (PC)	780
Outer case size	370 x 154 x 230 (mm)
Product status	Available

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Entertainment Solution Spectrum Catalogue \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)

Disclaimer

Special Purpose Lamp, Not suited for household illumination