


RC-1002 Layout

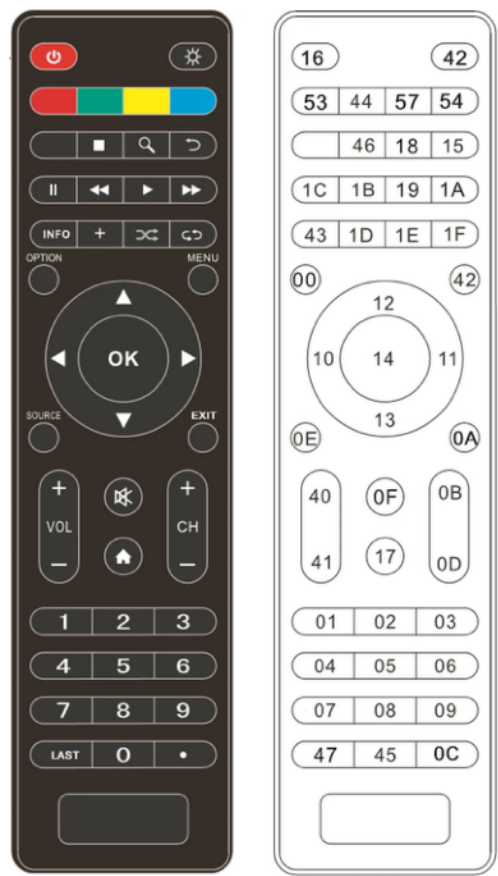

KEYCODES
Custom Code: 6F90

Unique Code	Button Description	Decimal Value
16	power	7311382
42	brightness	7311426
17	home	7311383
18	search	7311384
15	back	7311381
12	up	7311378
11	right	7311377
13	down	7311379
10	left	7311376
14	OK	7311380
1B	rewind	7311387
19	play	7311385

	1A	fast forward		7311386
	1C	pause		7311388
	1E	shuffle		7311390
	1D	add		7311389
	1F	repeat		7311391
	40	volume up		7311424
	41	volume down		7311425
	43	info		7311427
	42	menu		7311426
	B	channel up		7311371
	D	channel down		7311373
	F	mute		7311375
	1		1	7311361
	2		2	7311362
	3		3	7311363
	4		4	7311364
	5		5	7311365
	6		6	7311366
	7		7	7311367
	8		8	7311368
	9		9	7311369
	45		0	7311429
	C	Period "."		7311372
	47	last		7311431
	0	option		7311360
	E	source		7311374
	A	exit		7311370
	46	stop		7311430
	53	Red		7311443
	44	Green		7311428
	57	Yellow		7311447
	54	Blue		7311444