




GE
Lighting

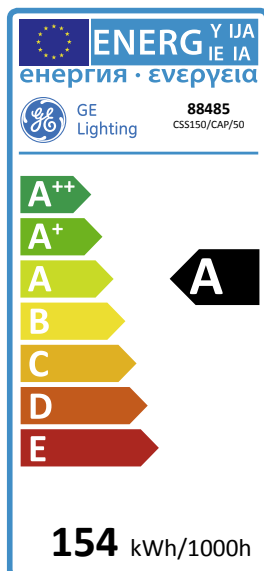

154
kWh/1000h

A
energy class

64
lumens/watt

CSS

CSS150/CAP/50

88485

Product information

A 150W discharge lamp for use in moving lighting fixtures.

Application areas

 Other



Product data

Cap/Base	GY9.5
Bulb Shape	Tubular
Bulb Finish	Clear
Bulb Diameter [mm]	16.5
Maximum Overall Length [mm]	48.64
Light Center Length [mm]	30
Arc Gap	6
Net weight per piece [g]	10
Gross weight per piece [g]	13
Operating position	VBD - Vert Base Down
Brand	General Electric (GE)

Performance data

Colour Code	850
Colour Rendering Index (CRI) [Ra]	80
Nominal correlated colour temperature (CCT) [K]	5000
Nominal lumens [lm]	9000
Energy efficiency class (EEC)	A
Nominal chromaticity coordinate X	0.3
Nominal chromaticity coordinate Y	0.3
Weighted energy consumption [kWh/1000h]	154

Electrical data

Nominal power [W]	140
Nominal lamp voltage [V]	85
Lamp Current [A]	1.87
Dimming Capability	No
Ballast Required	Yes

Logistic data

DUN Code	10043168884850
EAN Code	0043168884853
Pack Quantity	10
Layer quantity	560 EUR, 720 UK
Layer quantity EUR	560
Layer quantity UK	720
Pallet quantity EUR (PC)	5040
Pallet quantity UK (PC)	5040
Outer case size	195 x 80 x 115 (mm)
Product status	Available

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Entertainment Solution Spectrum Catalogue \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)

Disclaimer

Special Purpose Lamp, Not suited for household illumination