

KTC LED.PowerSpot.Hilux 6W LED

6W 60° GU10 PAR16 LED SMD Lamp



Product Overview

The KTC-SMD range is perfect for home, office and hospitality settings with all the environmental and financial benefits of LED technology. A direct retrofit for standard halogen GU10 lamps, the SMD range provides a choice of wattages. Each SMD lamp blends into decorative fittings with a stylish lamp body, while PPS Thermally Conductive Plastic provides excellent heat dissipation and electrical insulation making them the ideal choice for many installations.

Features

- Save energy up to 90% compared with halogen lamp.
- Direct replacement of halogen GU10 lamp.
- 60° beam angles.
- High lumen output.
- Long life of 30,000h.
- Instant start.
- Negligible UV output.
- Mercury free.

Safety and Maintenance

- Switch off supply and allow cooling before handling lamp.
- Use in totally enclosed fittings will reduce lamp life.
- Do not dispose of lamp in household waste.
- Dispose of in appropriate section of local civic amenity site or recycling centre.

Specifications 60° Beam Angle

Product Code	KSMD06PWR/GU10-F30	KSMD06PWR/GU10-F40	KSMD06PWR/GU10-F65
Lamp Cap	GU10	GU10	GU10
Lamp Shape	PAR16	PAR16	PAR16
Nominal Power (W)	6	6	6
Voltage	220-240Vac 50-60Hz	220-240Vac 50-60Hz	220-240Vac 50-60Hz
Current (mA)	47	47	47
Nominal Useful Luminous Flux (lm)	400	400	400
Total Luminous Flux (lm)	600	600	600
CCT (K)	3000K Warm White	4000K Cool White	6500K Day Light
Nominal Lifetime (h)	30000	30000	30000
Beam Angle (°)	60	60	60
Dimmable	No	No	No
Switching Cycles	50000	50000	50000
Warm-up time to 60% (S)	Instant full light	Instant full light	Instant full light
Suitable for accent lighting	Yes	Yes	Yes
Length (mm)	54.0	54.0	54.0
Diameter (mm)	50.0	50.0	50.0
Mercury (mg)	0	0	0
Clean-up instructions	N/A	N/A	N/A
Retrofit	Yes	Yes	Yes
Equivalent Wattage (W)	58	58	58
Rated Power (W)	6.0	6.0	6.0
Rated Useful Luminous Flux (lm)	400	400	400
Rated Lifetime (h)	30000	30000	30000
Power Factor	0.56	0.56	0.56
Rated Peak Candelas (cd)	370	370	370
LMF at Nominal Lifetime	0.75	0.75	0.75
SDCM of CCT	<6	<6	<6
CRI	82	82	86
Start Time (s)	0.40	0.40	0.40
Ambient Temperature Range (°C)	-20 to 40	-20 to 40	-20 to 40

Notes: The Useful Luminous Flux quoted is for the output within a 90° cone as per the EU implementing directive on ecodesign requirements for directional lamps.

Product Markings 60° Beam Angle


Manufacturer	Kosnic	Kosnic	Kosnic
Product Code	KSMD06PWR/GU10-F30	KSMD06PWR/GU10-F40	KSMD06PWR/GU10-F65
Volts (V)	220-240Vac 50-60Hz	220-240Vac 50-60Hz	220-240Vac 50-60Hz
Nominal Watts (W)	6	6	6
Current (mA)	47	47	47
Nominal Useful Luminous Flux (lm)	400	400	400
CCT (K)	3000	4000	6500
Beam Angle (°)	60	60	60
CE Mark	Yes	Yes	Yes
WEEE Mark	Yes	Yes	Yes
Batch Code	Yes	Yes	Yes

Energy Label 60° Beam Angle


Manufacturer	Kosnic	Kosnic	Kosnic
Product Code	KSMD06PWR/GU10-F30	KSMD06PWR/GU10-F40	KSMD06PWR/GU10-F65
Energy Class	A+	A+	A+
Energy Consumption (kWh/1000h)	6	6	6

Photometric Information 60° Beam Angle


3000K

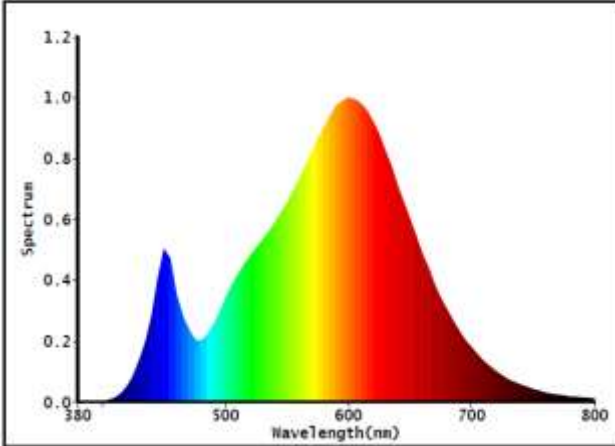

4000K

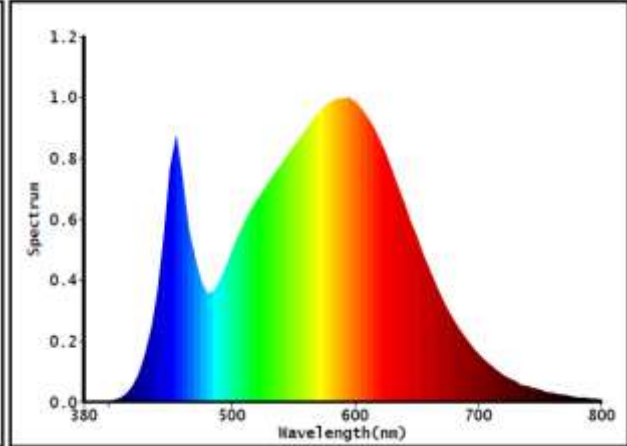

6500K

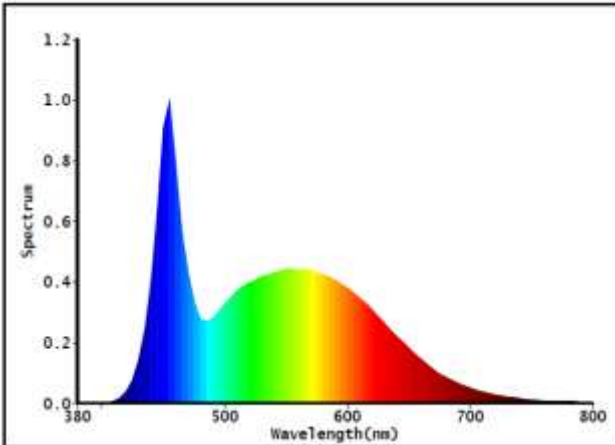

Dimensions

