

## Application data

Beam style	symmetric flood
Suitable for	general stage floodlighting
Specification level	professional range
Typical throw distance	2 - 10m

## Electrical data

Supply Volts	230/240V AC single phase
Max. Lamp Watts	1250W
Lamp base	R7s
Auto-disconnect	double-pole microswitch
Cable/connection	1.5m, 3x1.5mm <sup>2</sup> flexible cable to bare ends
Standards Compliance	EN60598-2-17, CE marked

## Mechanical data

Paint/Finish	black/silver/white epoxy powder paint
Lamp House Construction	1-compartment, may be coupled together with identical units to create a 2/3/4 compartment batten, available accessories for domino assembling.
Reflector	symmetrical, aluminium
Mounting & suspension	steel stirrup with 12mm centre hole and DIN mounting
Weight/Packed weight	5.3kg / 7.1kg
Overall dimensions	390mm (w) x 165mm (d) x 280mm (h) x max 335mm(h)
Packed volume	0.069m <sup>3</sup>
Filter cut size	290 x 270mm
Accessory runners	1 slot
Safety glass	included
Colour frame	metal, 290 x 270mm supplied
Lamp access	front access

## Operational data

Working position	max. tilting $\pm 180^\circ$ from vertical
Positional adjustment	tilt lock on one side

## Lamp types

625W	P2/10 R7s 230/240V 3200K 150 hrs
1000W	P2/7 R7s 230/240V 3200K 200 hrs
1250W	P2/12 R7s 230/240V 3200K 200 hrs

## LDR recommends Philips lamps

## Accessories

Lamps	see above
Spare metal colour frame	■20100112 □2010012B ■2010012C
Spare clear safety glass	20101412
4-leaf barndoor	■20100492 □20100492B ■20100492C
3-leaf barndoor	■20100612 □20100612B ■20100612C
2-leaf barndoor	■20100512 □20100512B ■20100512C
Kit for square mounting	20101912
Kit for linear mounting 2/3 Innos	20102612
Kit for linear mounting 4 Innos	20102614
Hook clamp	20100900
Alu-grip clamp	20101100
Safety bond	20101200

## Photometric data

Horizontal												P2/7
Beam dia.	4.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0	m		
lux	4875	2167	1219	750	542	398	305	241	195			
Distance	2	3	4	5	6	7	8	9	10	m		

Vertical											
Beam dia.	4.4	6.5	8.7	10.9	13.1	15.3	17.5	19.6	21.8	m	
lux	5125	2278	1281	820	569	418	320	253	205		
Distance	2	3	4	5	6	7	8	9	10	m	

LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

# inno<sup>®</sup> S1000


## 625W - 1250W

### symmetric floodlight

part number: ■10806060 □10806061 ■10806062



CE

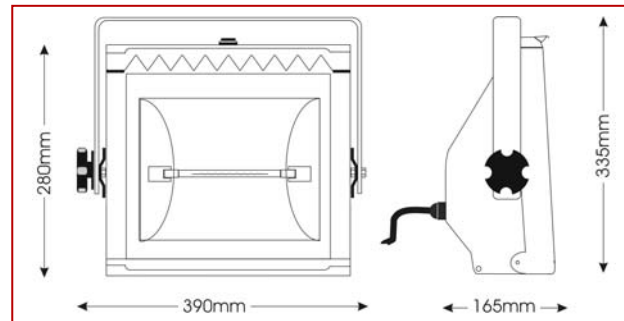

Also for larger venues, this 1000W symmetric floodlight produces a wide, even wash of light for general lighting purposes. Each unit is complete with a safety glass and a double microswitch interlock for safe lamp replacement. The modular design enables several units to be coupled together to form a compartment batten.

A colour frame, safety glass and 1.5m mains cable is included as a standard.

**To special order also available  
with extended front-door**

LDR  
luci della ribalta

Luci della Ribalta srl  
Via Berna 14  
46042 Castel Goffredo (MN), Italy  
tel: +39 0376 771777  
fax: +39 0376 772140  
[www.ldr.it](http://www.ldr.it) [info@ldr.it](mailto:info@ldr.it)

Issue: ap ©2006. LDR reserves the right to alter the specification without prior notice.