

NT2-A

Multi Pattern 1" Condenser Microphone

AUSTRALIA
107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA
PO Box 91028, Long Beach CA 90809-1028
Ph: +1 562 364 7400 Fax: +1 888 412 4664




Features


- Large 1" (25mm) HF1 gold sputtered capsule
- On body control of polar pattern, HPF and PAD
- Three position variable polar pattern - Omni, Cardioid or Figure 8
- Three position variable High-Pass Filter - Flat, 40Hz or 80Hz
- Three position PAD - 0dB, -5dB or -10dB
- Ultra low noise, transformerless surface mount circuitry
- Includes SM6 shock mount with integrated pop filter, 3m XLR cable, dustcover and exclusive training DVD.
- Internal capsule shock mounting
- Designed and manufactured in Australia
- 10 year warranty*

Specifications

Acoustic Principle	Pressure, Pressure gradient
Directional Pattern	Three position variable - Omni, Cardioid or Figure 8
Frequency Range	20 Hz-20 kHz
Sensitivity	-36 dB re 1 Volt/Pascal (16 mV @ 94 dB SPL) +/- 2 dB @ 1kHz
Output Impedance	200Ω
Dimensions	Length - 209mm (8.2283") Diameter - 55mm (2.1653")
Output Connection	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)
Shipping Weight	1kg
Net Weight	860g

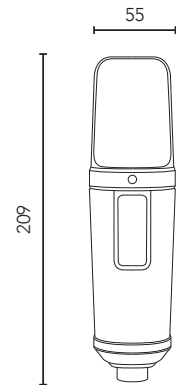


Polar Pattern

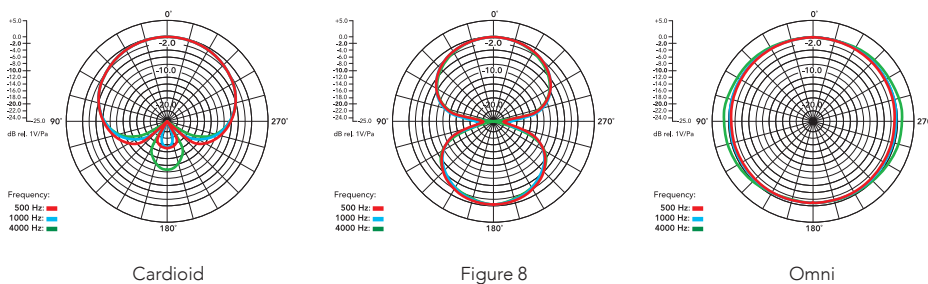

Accessories

- SM6 Shock mount
- 6m XLR cable
- Microphone dustcover
- Exclusive NT2-A training DVD

Frequency Response

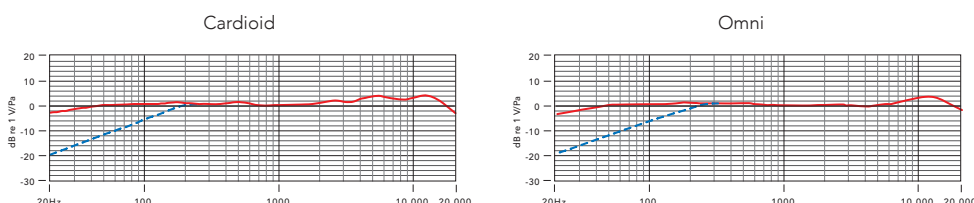

Notes

*Microphone must be registered at www.rodemic.com to activate extended warranty.

RØDE
MICROPHONES