


BNC

75Ω Cable Jack Panel version

Assembly Instructions

A Slide the crimp ferrule onto the cable

B Prepare cable as shown
- Use an adjustable coaxial cable stripper

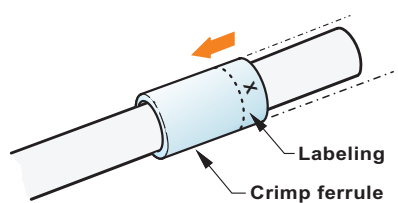
C Spread the braided shield
(It's easily with the Neutrik "SHIELD-SPREADING-TOOL"!) 

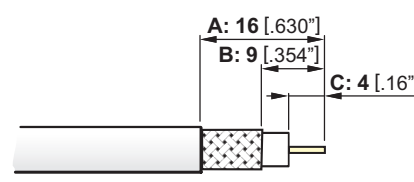
D Crimp the pin
- position the pin on the center conductor
- Crimp the pin with the tool
(For best crimping-results it is recommended to use the original Neutrik crimp tool
- HXBNC with the corresponding insert
or hexcrimp acc. to IEC 803-W (SW 1.7)
or squarecrimp acc. to IEC 803-2 (SW 1.6)
- Pin can also be soldered (Optional!)
- Straighten the pin if misaligned.


E Insert the cable into the connector body


F Slide the crimp ferrule over the shield to the front and push the cable and leading ferrule to it's end position until you hear a snap noise.

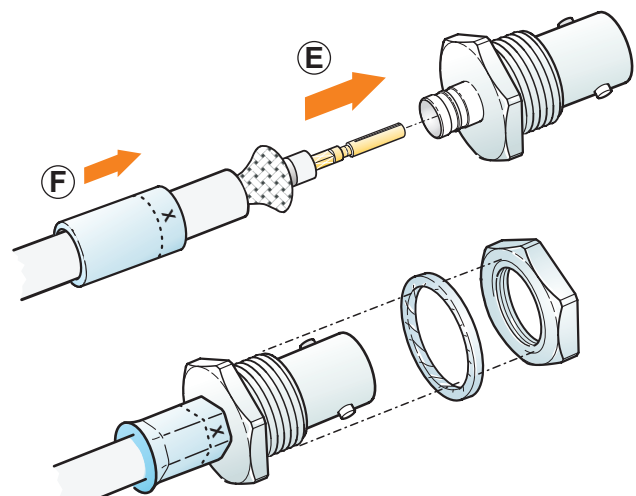
G Crimp the ferrule with the tool
(For best crimping-results it is recommended to use the original Neutrik tool - HXBNC with the corresponding insert)

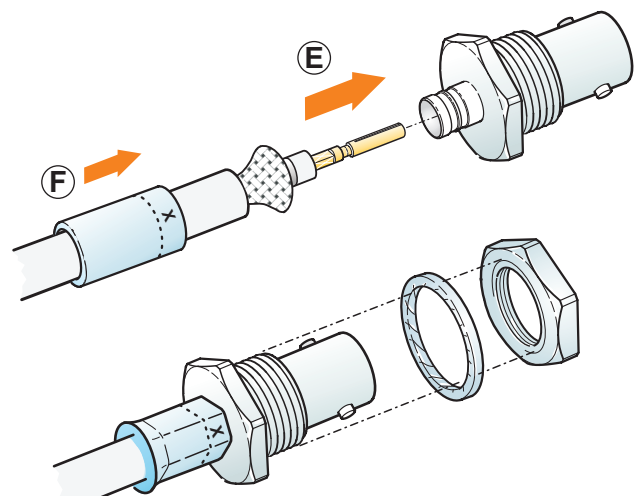
A  Labeling
Crimp ferrule

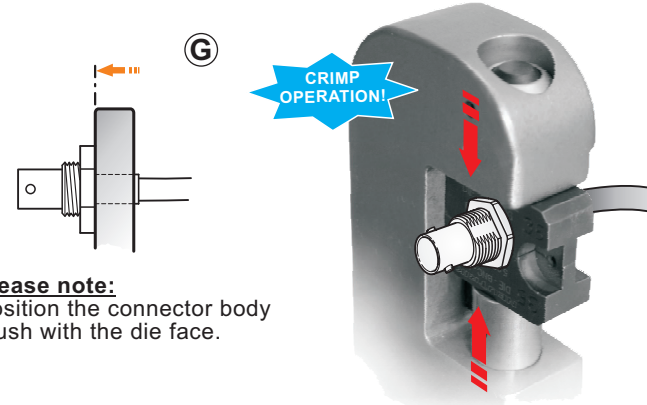
B  A: 16 [.630"]
B: 9 [.354"]
C: 4 [.16"]

C  Don't damage the foil!
(if existing)

D  Pin flush to the insulator

E 

F 

G  CRIMP OPERATION!

Please note:
Position the connector body
Flush with the die face.

NEUTRIK AG

Liechtenstein
Tel.: +423/237 24 24
Fax: +423/232 53 93
www.neutrik.com

NEUTRIK Zürich AG

Switzerland
Tel.: +41 44/736 5010
Fax: +41 44/736 5011

NEUTRIK (UK) Ltd.

Great Britain
Tel.: +44 1983/811 441
Fax: +44 1983/811 439

NEUTRIK USA INC.

USA
Tel.: +1 732/901 9488
Fax: +1 732/901 9608

NEUTRIK Tokyo Ltd.

Japan
Tel.: +81 3/3663 4733
Fax: +81 3/3663 4796

NEUTRIK France

France
Tel.: +33 1/4131 6750
Fax: +33 1/4131 0511

NEUTRIK Vertriebs GmbH

Germany/Netherlands/Austria
Tel.: +49 8131/28 08 90
Fax: +49 8131/28 08-30

Draft Nr.: BDA 120 / 3102M1201
Update: 06.03. 2006



NEUTRIK
CONNECTING THE WORLD

Data subject to change without prior notice. ©2006 NEUTRIK®. ALL RIGHTS RESERVED.