


WasherFX 1200 E-Frost



Floodlights

WasherFX1200 E-Frost from the ART series is an advanced FX floodlight designed for professional event, stage, and installation use. Its dual RGBW LED system — main and auxiliary LEDs — can be controlled independently, enabling full pixel control and the creation of dynamic lighting effects and animations. The integrated Frost filter delivers soft, even wash light, ideal for stage, architectural, and event applications. Support for DMX512, RDM, Auto, and Master-Slave modes ensures seamless integration into professional lighting systems. Rugged construction, active cooling, and an IP65-rated housing guarantee reliable indoor and outdoor operation, even in demanding conditions.

flash fixtures: We have our own database of **ready-made fixtures**. Check if your product is included in the database, or place an order by emailing us at fixtures@flashpro.pl

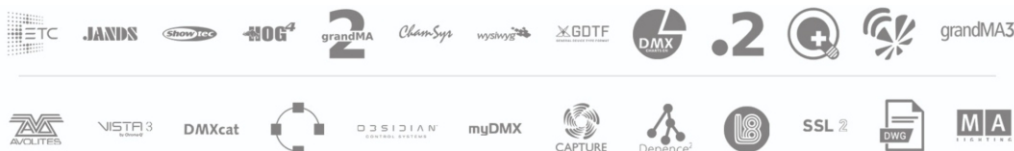

Product code: **F7100227**

Product Specification

Power Source (AC)

Supply voltage **100-240V**
Power consumption **1200W**
Power frequency **50-60Hz**

Light source

Type LED 1 (RGBW)
Quantity **24**
Power (W) **40**
Type LED 2 (RGBW)
Type **24**
Power (W) **6**
Number of control sections **48**

Color Mixing System

RGBW **16 bit**

Dimming

Dimming **16 bit**

E-Frost

E-Frost **60°**

Beam angle

Beam angle 1 **10-60°**
Beam angle 2 **110°**

Strobe - frequency

Frequency **0Hz-25Hz**
Random **Yes**

DMX control

Number of modes **12**
Number of channels **30-314**

Movement

Range TILT **180°**
Regulation **16 bit**

Modes of operation

DMX512 **Yes**
RDM **Yes**
Auto control **Yes**
Master-slave **Yes**

User Interface

Buttons **Capacitive (touch)**
Display **LCD display**

Connectors

AC IN **TrueCon IP65**
DMX IN **3-pin XLR IP65**
DMX OUT **3-pin XLR IP65**
ETHERCON **In**
ETHERCON **On**

Physical parameters

IP protection level **IP65**
Housing type **Aluminium**
Fixing **Integrated**
Housing Color **Black**
Cooling **Active**
Dimensions LxWxH [cm] **40 x 20 x 35**
Weight [kg] **15**