

## MASK8-BL

8" high SPL two-way loudspeaker,  
black



MASK8 is a robust 8" high SPL two-way loudspeaker for low impedance installations. This unique and innovative design loudspeaker used in conjunction with a subwoofer will deliver high intelligibility and vocal perfection! The curved fine metal grille together with its timeless shape gives MASK8 a different, yet inconspicuous look.

MASK8 loudspeakers can be used as full range loudspeakers, however we advise to use them in combination with the Apart subwoofers SUB2201 and SUB2400. Its wide frequency range makes sure every note, starting from the punchy bass over the clean middle range to the crystal clear highs, reaches your ears with an astonishing clarity. MASK8 has a very powerful 8" coated paper cone woofer. Together with the 1" Ferro-fluid cooled silk dome tweeter on a Waveguide horn, this results in a high SPL, an ultra low distortion and a sound that comes close to studio monitor quality.

After mounting the bracket on the wall, the sleeve in the bracket makes it quite easy and safe to fix the loudspeaker, even in uncomfortable positions. The MASK8 cabinet has several thread mounting points tapped at the back, the top and side of the cabinet. This way the cabinet can be rigged or mounting clamps can be used. An extra contractor advantage! MASK8 also has a pole mount adapter in its bottom. This adapter makes it possible to mount the speaker on top of a standard 35mm pole such as the Apart STSUB and STT.

The built-in Auto-Reset 2-step Protection Guard together with the quality components makes MASK8 a fail-safe loudspeaker, even at high power loads! MASK8 is delivered with a metal U-bracket.


### TECHNICAL SPECIFICATIONS

height in mm	411	width in mm	250
depth in mm	250	loudspeaker system	2-way
woofer size in inch	8	woofer cone material	paper
tweeter size in inch	1	mounting system	U-bracket
colour	black / white	impedance (ohms)	8
low impedance dynamic power in watts	300	low impedance RMS power in watts	200
SPL 1W/1m in dB	92	max SPL 1m in dB	116
frequency response in Hz	60 - 20K	main construction material	mdf wood
grille main material	steel	IP rating	40
Horizontal dispersion angle 1000 Hz	160°	Vertical dispersion angle 1000 Hz	180°
closest RAL colour (subject to deviations)	RAL9003 (W) / RAL9011 (BL)	Net weight product (kg)	9,00

## POLAR PLOTS


Data Shown: MASK8 (Apart Audio)  
 Display Parameters: Frequency: 1000Hz (1/24th Octave)

Horizontal  
 Vertical

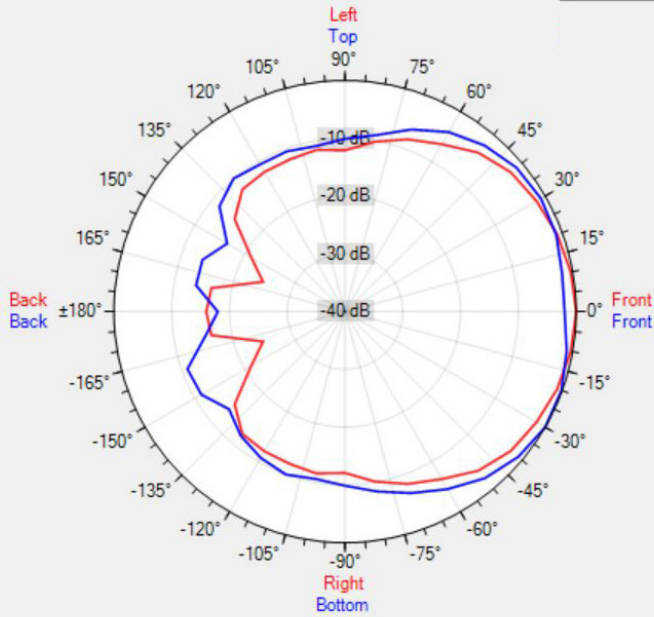


Data Shown: MASK8 (Apart Audio)  
 Display Parameters: Frequency: 2000Hz (1/24th Octave)

Horizontal  
 Vertical

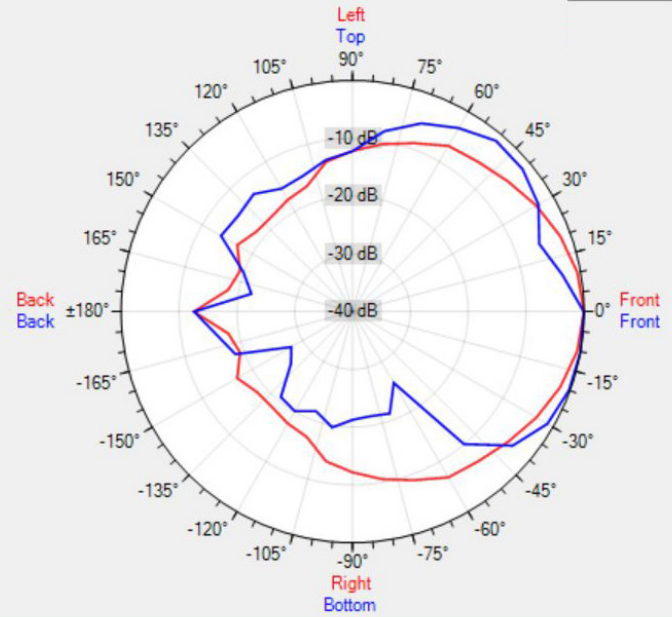


Data Shown: MASK8 (Apart Audio)  
 Display Parameters: Frequency: 4000Hz (1/24th Octave)

Horizontal  
 Vertical

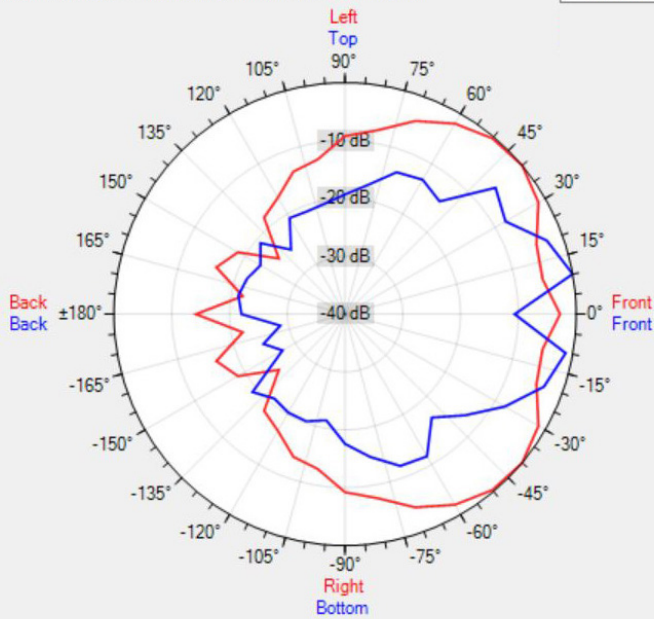

Data Shown: MASK8 (Apart Audio)  
 Display Parameters: Frequency: 8000Hz (1/24th Octave)

Horizontal  
 Vertical

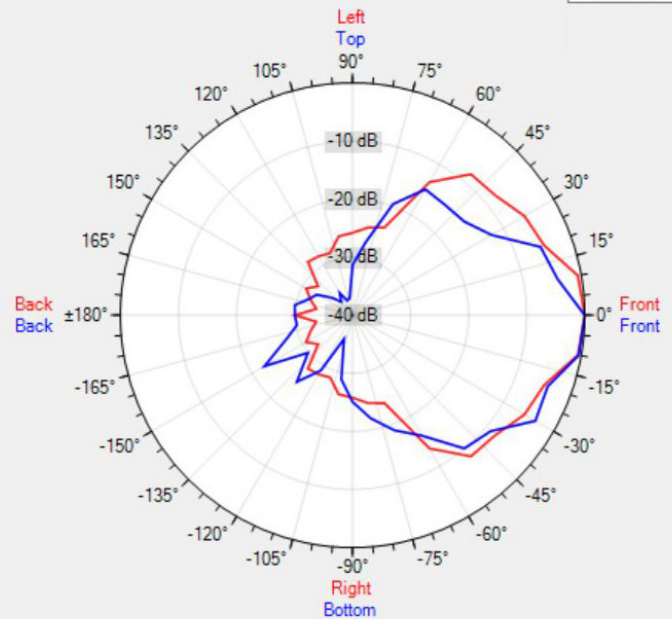

MORE PICTURES



ACCESSORIES



**STT**

T-adaptor for 2 MASK8 on one pole



**STSUB**

Pole stand for MASK8 onto Sub with pole adapter



**STFLOOR**

Floorstand for speaker with pole adapter