


SWATCHBOOK: GamColor
COLOR FILTER: 375 Flame
DESCRIPTION: Color Effects Lighting Filter.
TRANSMISSION = Y 58% or stop loss
MIRE D SHIFT = Not Applicable.
CC EQUIVALENT = Not Applicable.

COLORIMETRIC DATA

OBSERVER: CIE 1964 10°
SOURCE: • 'A' (tungsten)
 ◦ 'D65' (daylight)
R: 255
G: 166.5
B: 89.38

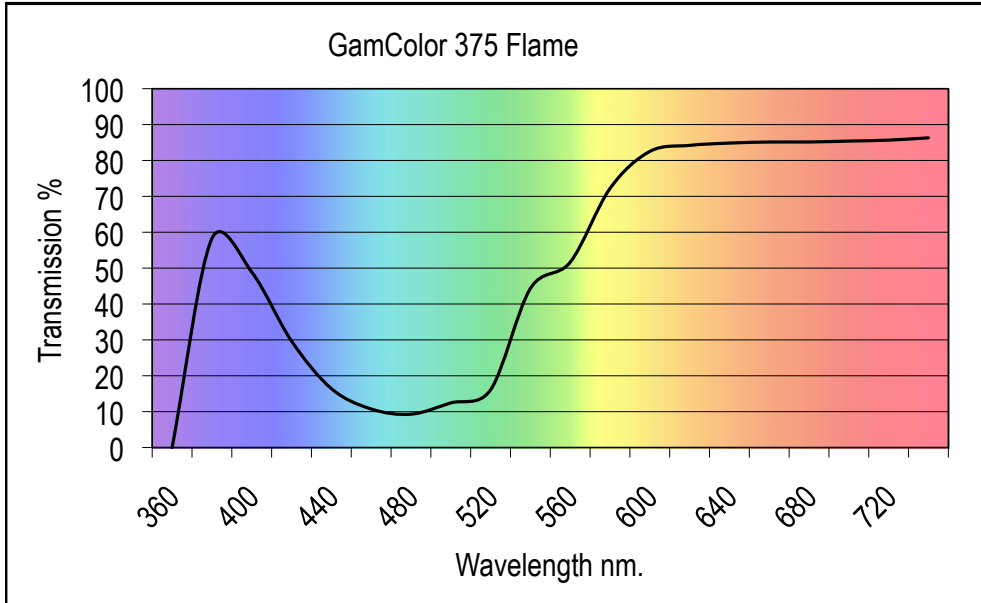


HUNTER LAB SOURCE A	
L*	80.645
A*	30.990
B*	61.430

HUNTER LAB SOURCE D65	
L*	74.56098
A*	32.29266
B*	48.57202

CIE 1964 10° SOURCE A	
Y	57.832
(x)	0.559
(y)	0.405

CIE 1964 10° SOURCE D65	
Y	47.583
(x)	0.471
(y)	0.392

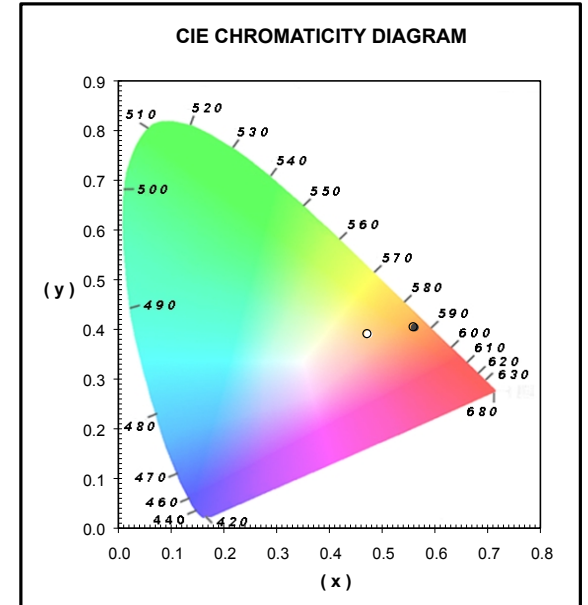

nm.	360	380	400	420	440	460	480	500	520	540	560	580	600	620	640	660	680	700	720	740
trans %	NA	58	49	30	16	11	9	12	16	44	52	72	83	84	85	85	85	85	86	86

MATERIAL SPECIFICATIONS:

General Description: Deep-Dyed Polyester
 Substrate: Polyester
 Thickness: 2.0 mil (.002" or 50 micron)

Manufactured in: U.S.A.

AVAILABLE SIZES:

- ✓ 20 in. x 24 in. sheets (50cm x 60cm)
- ✓ 21 in. x 24 in. sheets (53 x 60cm)
- ✓ 24 in. x 25 ft. rolls (60cm x 7.62m)
- ✓ 24 in. x 50 ft. (60cm x 15.24m)
- ✓ 24 in. x 198 in. (60cm x 5m)
- ✓ 48 in. x 25 ft. rolls (121cm x 7.62m)
- 60 in. x 20 ft. rolls (152.4cm x 6.10m)
- Consult Rosco