


**SWATCHBOOK:** ROSCOLUX  
**COLOR FILTER:** #64 LT STEEL BLUE  
**DESCRIPTION:** Color Effects Lighting Filter.  
**TRANSMISSION =** 26% or -2.0 stop loss  
**MIREID SHIFT =** Not Applicable.  
**CC EQUIVALENT =** Not Applicable.

**COLORIMETRIC DATA**

**OBSERVER:** CIE 1964 10°  
**SOURCE:**

- 'A' (tungsten)
- 'D65' (daylight)

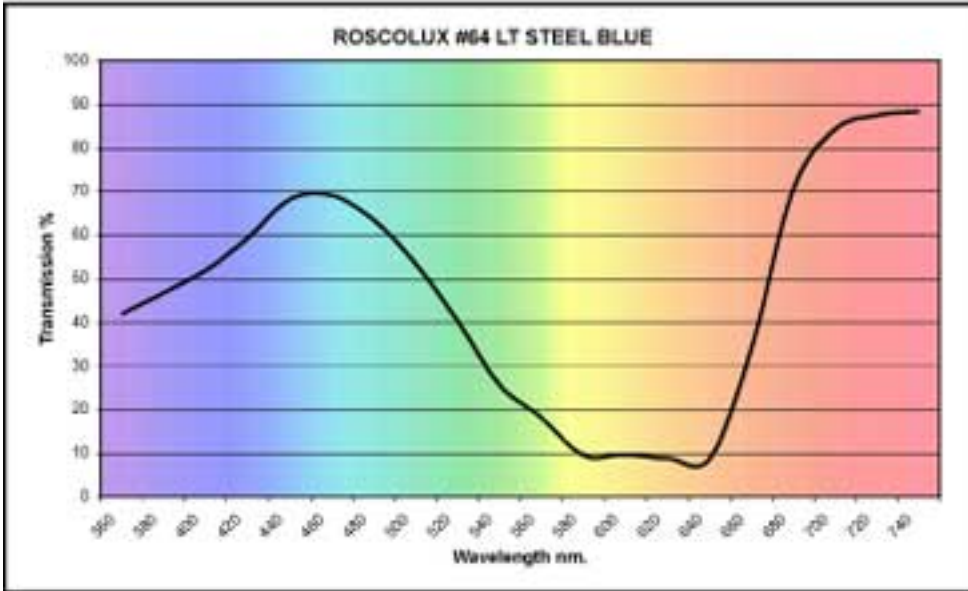


| HUNTER LAB SOURCE A |         |
|---------------------|---------|
| L*                  | 53.194  |
| A*                  | -24.303 |
| B*                  | -53.781 |

| HUNTER LAB SOURCE D65 |         |
|-----------------------|---------|
| L*                    | 59.252  |
| A*                    | -12.688 |
| B*                    | -43.925 |

| CIE 1964 SOURCE A |        |
|-------------------|--------|
| Y                 | 21.224 |
| (x)               | 0.290  |
| (y)               | 0.341  |

| CIE 1964 SOURCE D65 |        |
|---------------------|--------|
| Y                   | 27.301 |
| (x)                 | 0.189  |
| (y)                 | 0.226  |

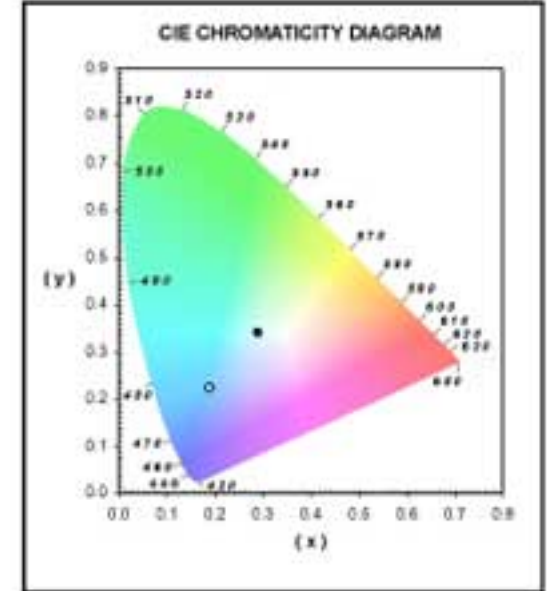

|         |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|---------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| nm.     | 360 | 380 | 400 | 420 | 440 | 460 | 480 | 500 | 520 | 540 | 560 | 580 | 600 | 620 | 640 | 660 | 680 | 700 | 720 | 740 |
| trans % | 42  | 47  | 52  | 59  | 68  | 69  | 84  | 53  | 40  | 26  | 18  | 10  | 10  | 9   | 9   | 34  | 71  | 84  | 88  | 88  |

**MATERIAL SPECIFICATIONS:**

**General Description:** Co-extruded Polycarbonate Film  
**Substrate:** PC (Polycarbonate)  
**Thickness:** 3.0 mil (.003" or 76.2 micron)  
  
**Manufactured in:** U.S.A.

**AVAILABLE SIZES:**

- √ 20 in. x 24 in. sheets (50cm x 60cm)
- √ 24 in. x 25 ft. rolls (60cm x 7.62m)
- 48 in. x 25 ft. rolls (121cm x 7.62m)
- 60 in. x 20 ft. rolls (152.4cm x 6.10m)
- 13.5 in. Diameter Glass (34.3cm) - Cut to order