
A-1 live



Accessories

Fohhn Audio Interface.



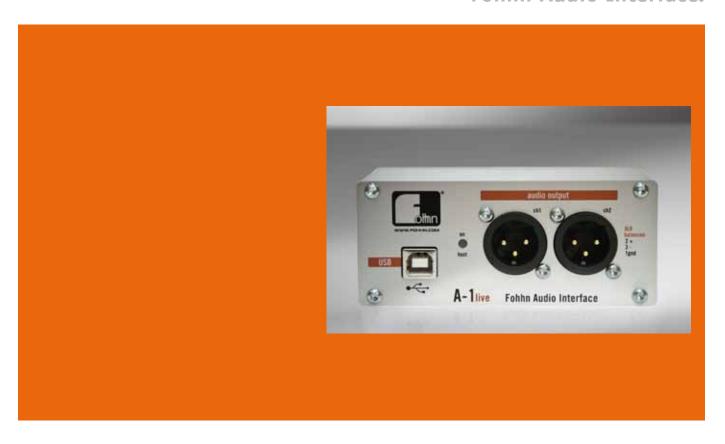



Description

The A-1 live has been specially developed to enable a high-quality, trouble-free transfer of audio data from a computer to a professional sound reinforcement system.

Despite offering a variety of functions and possibilities, many standard sound cards and interfaces often lack either balanced XLR outputs or a galvanically isolated USB connection. This frequently leads to interference, hum, poor transfer quality and insufficient output levels. With the A-1 live however, such problems become a thing of the past.

Easy handling

Using the A-1 live, the computer can be directly connected to the system via balanced XLR connectors, without the need for additional devices such as a mixer. A trouble-free connection is guaranteed, with no reduction in signal level and the galvanic isolation providing additional protection for your computer.

Connectors

The A-1 live is a high-quality, two-channel USB audio interface with balanced XLR outputs and a galvanically isolated USB connection.

Scope of delivery

The A-1 live comprises the following components:

- A-1 live Fohhn Audio Interface,
- USB cable

The new Fohhn Audio Interface.

Trouble-free, direct transmission of audio data from a computer to a professional sound reinforcement system, without any reduction in sound quality or level.

Requirements

The A-1 live is compatible with Windows XP, Windows Vista and Windows 7 (32-bit and 64-bit), as well as Mac OS 10.4 – 10.7 and Linux from Kernel 2.6.

Plus points


- installation does not require dedicated drivers
- excellent audio quality
- balanced XLR audio stereo outputs
- no DI box required
- galvanically isolated USB connection
- protects against hum and protects the computer
- no separate power supply is required


Technical Specifications

USB connection	USB 1.1 Full Speed, galvanically isolated
Audio stereo outputs	2-channel balanced XLR
Audio DAC	16-Bit 44,1 / 48 kHz
Output level	+10 dBu
power supply	USB powered /
	no separate power supply is required
dimensions (W x H x D)	150 x 45 x 50 mm



Applications

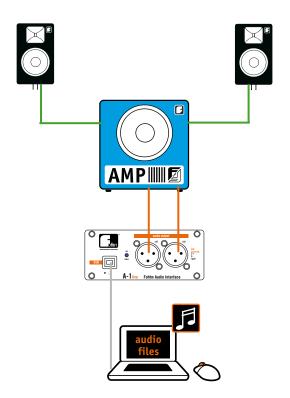

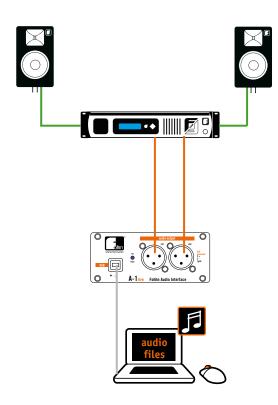

Fohhn Audio AG

Hohes Gestade 3-7
72622 Nürtingen
Germany
Tel. +49 7022 93323-0
Fax +49 7022 93324-0
www.fohhn.com
info@fohhn.com