


SWATCHBOOK: ROSCOLUX
 COLOR FILTER: #03 DRK BASTARD AMBER
 DESCRIPTION: Color Effects Lighting Filter.
 TRANSMISSION = 62% or -0.7 stop loss
 MIRED SHIFT = Not Applicable.
 CC EQUIVALENT = Not Applicable.

COLORIMETRIC DATA
 OBSERVER: CIE 1964 10°
 SOURCE: • 'A' (tungsten)
 ° 'D65' (daylight)

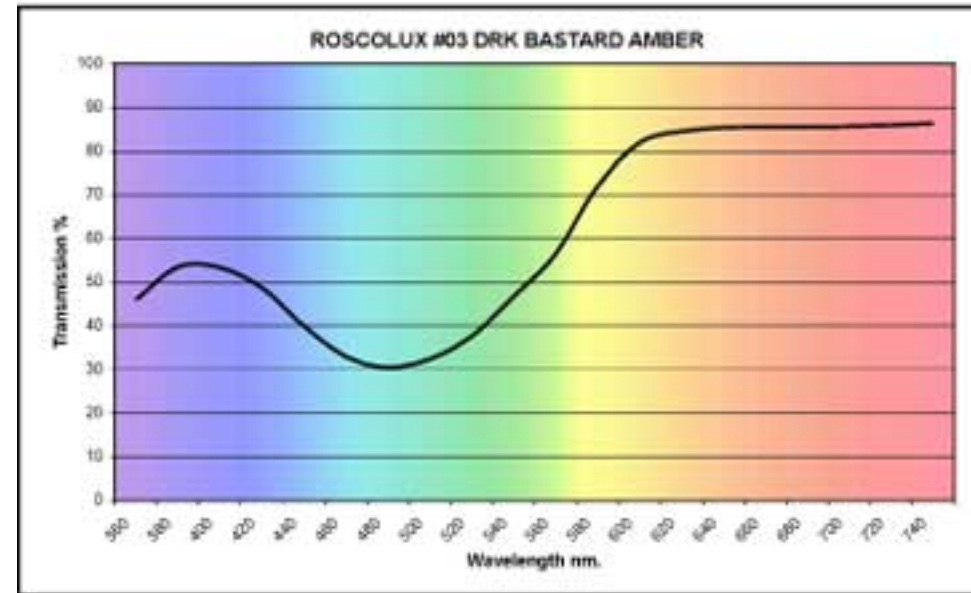


HUNTER LAB SOURCE A
L* 83.344
A* 23.611
B* 28.497

HUNTER LAB SOURCE D65
L* 79.336
A* 24.067
B* 20.247

CIE 1964 SOURCE A
Y 62.813
(x) 0.517
(y) 0.401

CIE 1964 SOURCE D65
Y 65.513
(x) 0.394
(y) 0.350

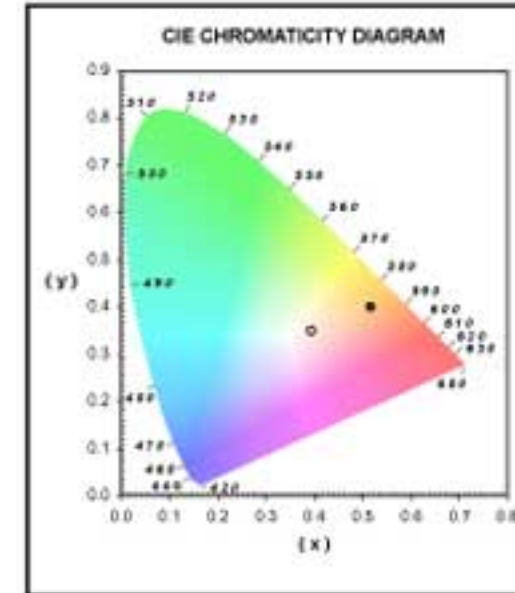

nm.	360	380	400	420	440	460	480	500	520	540	560	580	600	620	640	660	680	700	720	740
trans %	46	54	53	49	40	33	31	32	38	47	56	72	82	85	85	86	86	86	86	86

MATERIAL SPECIFICATIONS:
 General Description: Co-extruded Polycarbonate Film
 Substrate: PC (Polycarbonate)
 Thickness: 3.0 mil (.003" or 76.2 micron)
 Manufactured in: U.S.A.

AVAILABLE SIZES:
 ✓ 20 in. x 24 in. sheets (50cm x 60cm)
 ✓ 24 in. x 25 ft. rolls (60cm x 7.62m)
 48 in. x 25 ft. rolls (121cm x 7.62m)
 60 in. x 20 ft. rolls (152.4cm x 6.10m)
 13.5 in. Diameter Glass (34.3cm) - Cut to order