



Product code: **F7100779**


WashFX 2000 IP65 CRMX



Moving Heads WASH

WashFX 2000 IP65 CRMX is a professional Wash/FX moving head from the ART series, designed for demanding stage productions, concerts, events, and outdoor installations. With 37 high-power 40 W RGBW LEDs, it delivers strong output and rich color performance for wide washes and dynamic effects. Its IP65-rated design ensures reliable operation in all weather conditions, while integrated CRMX wireless DMX enables fast, cable-free setup on large productions. The fixture supports DMX512, W-DMX, Auto, and Master-Slave modes with multiple DMX channel options for seamless system integration. Rugged construction, active cooling, and waterproof connectors make WashFX 2000 IP65 CRMX a dependable choice for touring, festivals, and permanent installations.

flash fixtures: We have our own database of **ready-made fixtures**. Check if your product is included in the database, or place an order by emailing us at fixtures@flashpro.pl

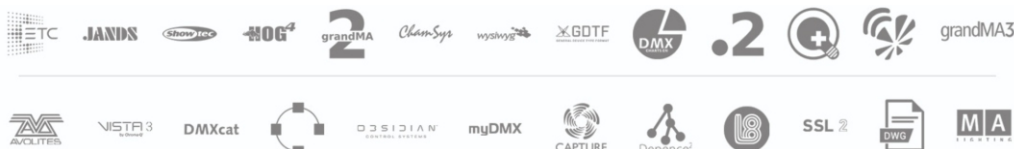

Product Specification

Power Source (AC)

Supply voltage **100-240V**
Power consumption **1450W**
Power frequency **50-60Hz**

Light source

Type LED **(RGBW)**
Quantity **37**
Power (W) **40**
Number of control sections **37**

Color Mixing System

RGBW **8 bit - 16 bit**

Dimming

Dimming **16 bit**
Dimming Curves **4**

ZOOM

ZOOM Motorized **8 bit**

Beam angle

Beam (50%) **5°-23°**
Field (10%) **5°-35°**

Strobe - frequency

Frequency **1Hz-25Hz**
Pulsating **Yes**
Random **Yes**

DMX control

Number of modes **6**
Number of channels **21-148**

Movement

Range PAN **540°**
Range TILT **270°**
Regulation **16 bit**

Modes of operation

DMX512 **Yes**
Auto control **Yes**
Master-slave **Yes**
W-DMX **Yes**
CRMX **Yes**
Art-Net **Yes**
RDM **Yes**

User Interface

Buttons **Capacitive (touch)**
Display **LCD display**

Connectors

AC IN **TrueCon IP65**
AC OUT **TrueCon IP65**
DMX IN **3-pin XLR IP65**
DMX OUT **3-pin XLR IP65**
Ethernet IN **EtherCON**
Ethernet OUT **EtherCON**

Physical parameters

IP protection level **IP65**
Housing type **Aluminium**
Fixing **Integrated**
Housing Color **Black**
Cooling **Active**
Length [cm] **53**
Width [cm] **27,9**
Height [cm] **66,3**
Weight [kg] **32,2**