


**SWATCHBOOK:**  
**COLOR FILTER:**  
**DESCRIPTION:**  
**TRANSMISSION =**  
**MIREL SHIFT =**  
**CC EQUIVALENT =**

**ROSCOLUX**  
**#81 URBAN BLUE**  
 Color Effects Lighting Filter.  
 10% or -3.3 stop loss  
 Not Applicable.  
 Not Applicable.

**COLORIMETRIC DATA**

**OBSERVER:** CIE 1964 10°  
**SOURCE:**

- 'A' (tungsten)
- ° 'D65' (daylight)

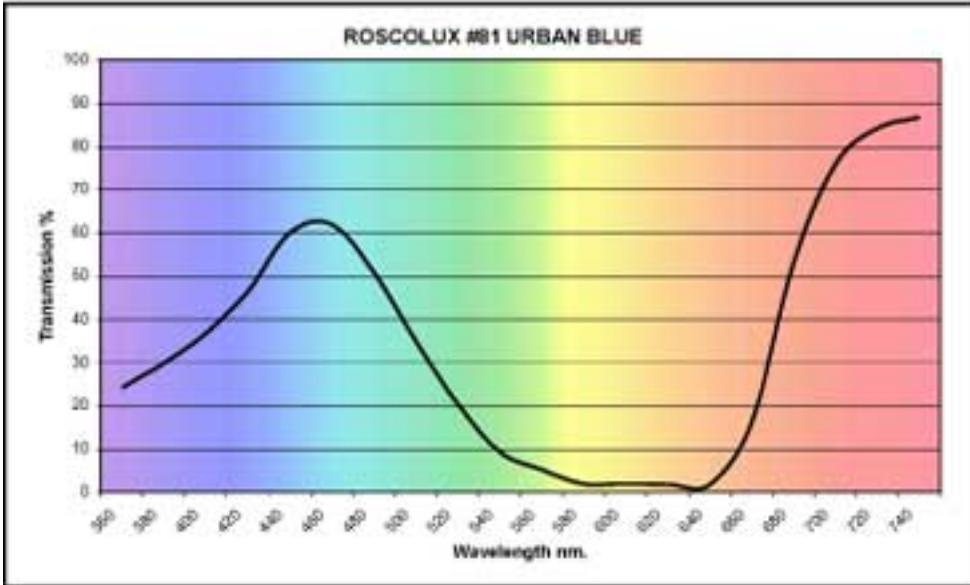


HUNTER LAB SOURCE A	
L*	36.876
A*	-20.032
B*	-72.314

HUNTER LAB SOURCE D65	
L*	44.709
A*	1.289
B*	-59.89

CIE 1964 SOURCE A	
Y	9.471
(x)	0.215
(y)	0.258

CIE 1964 SOURCE D65	
Y	14.335
(x)	0.155
(y)	0.161

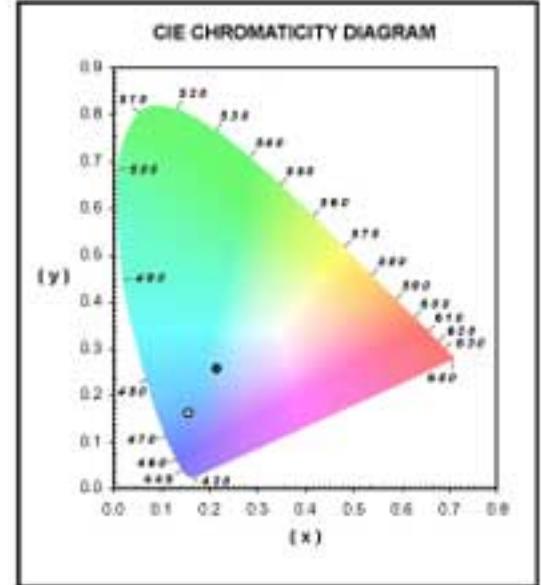

nm.	360	380	400	420	440	460	480	500	520	540	560	580	600	620	640	660	680	700	720	740
trans %	24	30	37	46	60	62	51	35	20	9	5	2	2	2	2	16	53	76	84	87

**MATERIAL SPECIFICATIONS:**

General Description: Co-extruded Polycarbonate Film  
 Substrate: PC (Polycarbonate)  
 Thickness: 3.0 mil (.003" or 76.2 micron)  
 Manufactured in: U.S.A.

**AVAILABLE SIZES:**

- ✓ 20 in. x 24 in. sheets (50cm x 60cm)
- ✓ 24 in. x 25 ft. rolls (60cm x 7.62m)
- 48 in. x 25 ft. rolls (121cm x 7.62m)
- 60 in. x 20 ft. rolls (152.4cm x 6.10m)
- 13.5 in. Diameter Glass (34.3cm) - Cut to order